


Colossal 400 OPAL
COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE
2071333



Product features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 3560lm luminuous flux, 27W system power, 132lm/W luminiaire efficacy. Constant current driver. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 600mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

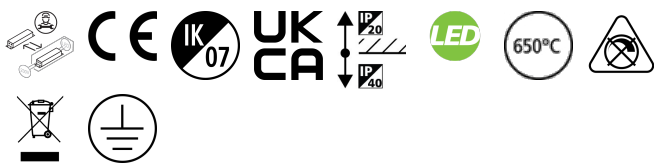

PRODUCT OVERVIEW

Product name	COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3560
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 24
Photobiological Risk Group	RG0
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768713332

DATA TABLE

General data	
Product name	COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE

Colossal 400 OPAL

COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE

2071333

Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
General application	Hospitality, Office
Operating temperature range (°C)	10°C...+25°C
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3560
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 24
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	27
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.93
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Inrush Current (A)	8
Inrush Duration (µs)	80
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	65
Max. products per 13A C Breaker	80
Max. products per 16A C Breaker	100
Max. products per 20A C Breaker	125
Max. products per 10A B Breaker	65
Max. products per 13A B Breaker	80
Max. products per 16A B Breaker	100
Max. products per 20A B Breaker	125

Colossal 400 OPAL

COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE
2071333

Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	400
Weight (kg)	6.5


Packaging

Single packaging type	Carton
Product EAN number	5025768713332
Packaging single length / height (cm)	14.0
Packaging single width (cm)	47.0
Packaging single depth (cm)	47.0
DUN14 (outer)	05025768713332
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	47.0
Packaging outer depth (cm)	47.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

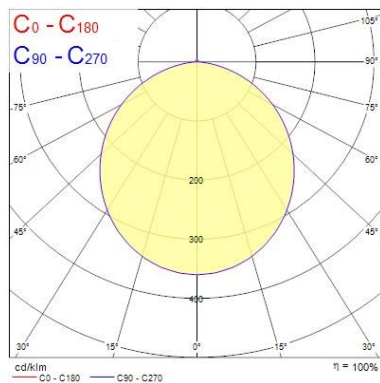

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C90)
0.5	1.41	5127 54.7°	496
1.0	2.82	1282 54.7°	124
1.5	4.24	570 54.7°	56
2.0	5.65	320 54.7°	31
2.5	7.06	205 54.7°	20
3.0	8.47	142 54.7°	14

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 109.4°) Illuminance [lx]

Colossal 400 OPAL

COLOSSAL 400mm HO 840 OPAL DIR+HAL WHITE

2071333

TECHNICAL DRAWINGS

