



Key fob switch



K4548



K4549

Use

Key fob switch to switch ON lights and devices in hotel rooms.

Connection


Terminal type: screw clamp
Terminal capacity: 2 x 2,5 mm²
Stripping length: 8 mm
Compatible with flexible or rigid cables

Range

Designation	Cat. No.	Related Cover Codes
Key fob switch with RFID technology recognition	■ K4548	□ KW22 □ KM22 ■ KG22
Key fob switch	■ K4549	

Colours code: □ White □ Sand ■ Black

Overall dimensions (mm)

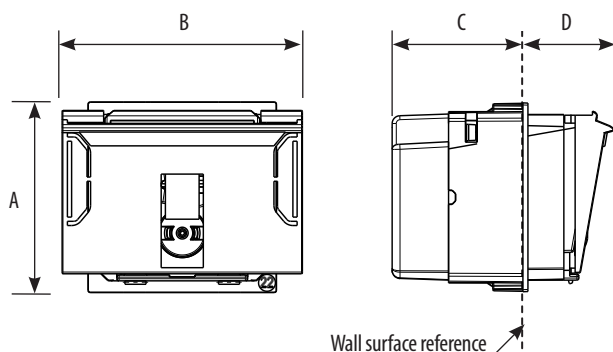

	A	B	C	D
K4548 - K4549	45.2	57	31.3	21.4

Technical characteristics

- Protection index

Penetration by solid bodies/liquid: IP20D (considering a complete installation, including cover plate and two "half-module blanking modules" item K4949)

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:

Case and Key cover: PC (Polycarbonate)

Halogen free.

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 230 VAC

Current: 30VA

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1-2

Refer to e.catalogue.