



### Features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 595x595x60mm, Sylvania White body colour, IP20, IK07, Electric Class 1, Light Engine Dimensions: 570x285mm, SylSmart SSC Controlled, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm, 41W, 110lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m<sup>2</sup>, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.

### Product Overview

<b>Product name</b>	RANA LED R 600 HO 4K LOUV+PRI SSC W GEN2
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture luminous flux (lm)</b>	4500
<b>Luminaire efficacy (lm/W)</b>	110
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	41
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	Electronic ballast

Light your world

## RANA LED R 600 HO 4K LOUV+PRI SSC W GEN2 0052517

**Housing colour** White


**IP rating** IP20

**IK rating** IK07

**Product EAN number** 5410288525174

**Warranty** 5 years

### Photometry

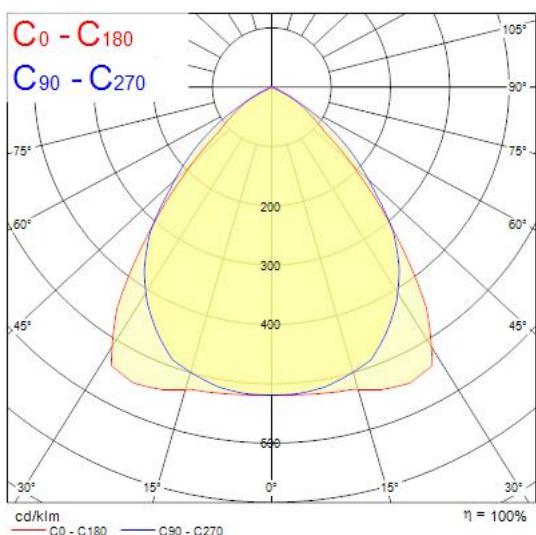

### Technical drawings

