

## SHP-S Super SHP-S 100W E40 SLV 0020692



### Product features

- High Pressure Sodium Lamp



## PRODUCT OVERVIEW

Product name	SHP-S 100W E40 SLV
Technology	HID
Watt (Rated) (W)	100
Cap/Base	E40
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4845559
E-number SE	8358113
E-number Norway	3824152
Useful luminous flux (Fuse)	9870
Luminous flux (lm)	9870
Colour temperature (K)	2050
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Wattage (W)	100
Dimmable	No
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	30000
Product EAN number	5410288206929

## DATA TABLE

### General data

Product name	SHP-S 100W E40 SLV
Technology	HID
Watt (Rated) (W)	100
Cap/Base	E40
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4845559
E-number SE	8358113

## SHP-S Super

*SHP-S 100W E40 SLV*  
0020692

E-number Norway	3824152
-----------------	---------

### Optical data

Useful luminous flux (Fuse)	9870
Luminous flux (lm)	9870
Luminous flux (Rated) (lm)	9870
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2050
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Luminous Intensity (cd)	Not Applicable
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h 50Hz	96
Rated lumen maint. factor (%) at 6000 h 50Hz	94
Rated lumen maint. factor (%) at 8000 h 50Hz	93
Rated lumen maint. factor (%) at 12000 h 50Hz	91
Rated lumen maint. factor (%) at 16000 h 50Hz	90
Rated lumen maint. factor (%) at 20000 h 50Hz	89

### Electrical data

Wattage (W)	100
Current (A)	1.2
Control gear required	Yes
Dimmable	No
Dimming method	Mains: leading / trailing edge
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	110

### Lifetime data

Average life (Nominal) (h)	30000
Average life (Rated) (h)	30000
Life T90	16000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	100
Rated survival factor (%) at 6000 h 50Hz	99
Rated survival factor (%) at 8000 h 50Hz	99
Rated survival factor (%) at 12000 h 50Hz	96
Rated survival factor (%) at 16000 h 50Hz	90
Rated survival factor (%) at 20000 h 50Hz	82

## SHP-S Super

### SHP-S 100W E40 SLV

### 0020692

#### Physical data

Nominal Product Length (mm)	186
Nominal Product Diameter (mm)	78
Max. Lamp Diameter (mm) - D	78
Weight (kg)	0.069


#### Packaging

Product EAN number	5410288206929
Packaging single length / height (cm)	18.0
Packaging single width (cm)	7.5
Packaging single depth (cm)	7.5
DUN14 (outer)	15410288206926
Units per outer package	40
Packaging outer length / height (cm)	45.0
Packaging outer width (cm)	38.0
Packaging outer depth (cm)	39.0


#### Safety data

Lamp mercury content (mg)	14.4
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	No

## PHOTOMETRY

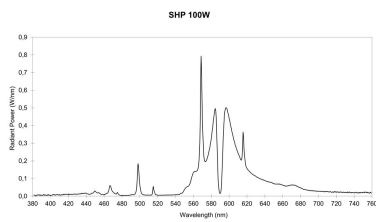


## TECHNICAL DRAWINGS



# SYLVANIA

SHP-S Super  
SHP-S 100W E40 SLV  
0020692

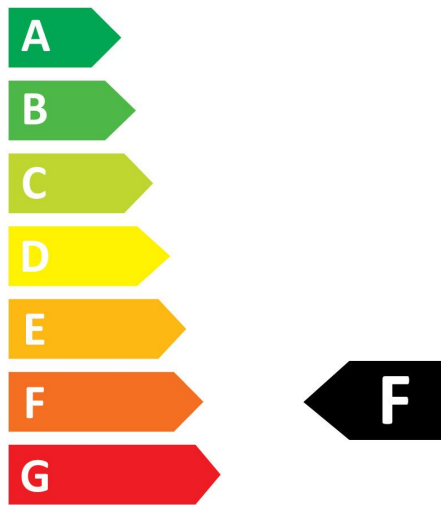

**100**  
kWh/1000h




2019/2015

# SYLVANIA

SHP-S Super  
SHP-S 100W E40 SLV  
0020692



0020692

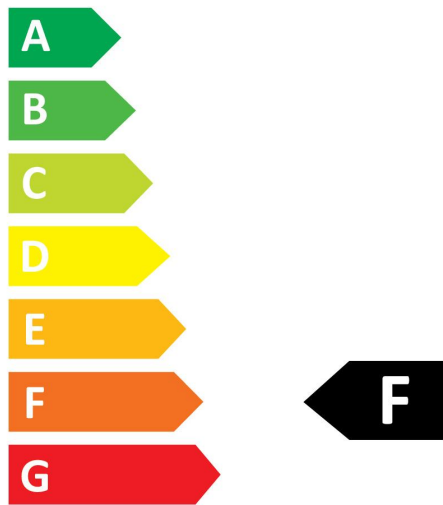

**100**  
kWh/1000h



2019/2015