



Features


- High Pressure Sodium Lamp



Product Overview


Product name	SHP-S 100W E40 SLV
Technology	HID
Watt (Rated) (W)	100
Cap/Base	E40
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4845559
E-number SE	8358113
E-number Norway	3824152
Luminous flux (lm)	9870
Colour temperature (K)	2050
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Wattage (W)	100
Dimmable	No
Average life (Nominal) (h)	30000
Product EAN number	5410288206929
Useful luminous flux (#use)	9870
Dimming method	Mains: leading / trailing edge

Technical drawings



SHP	50W	70W	100W	150W	250W	400W
L	165	165	178	227	227	292
D	72	72	78	91	91	122

E40

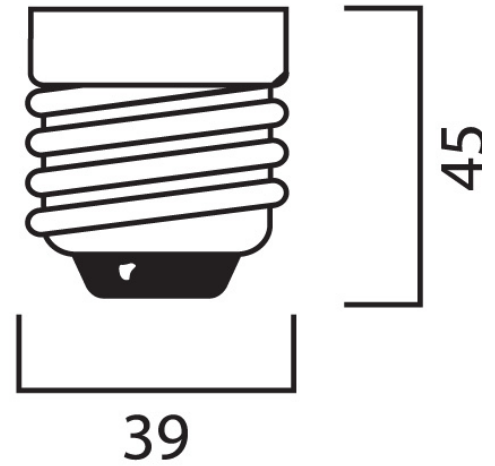

Data table

GENERAL DATA

Product name	SHP-S 100W E40 SLV
Technology	HID
Watt (Rated) (W)	100
Cap/Base	E40
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4845559
E-number SE	8358113

SHP-S 100W E40 SLV 0020692

E-number Norway 3824152

OPTICAL DATA

Useful luminous flux (#use)	9870
Luminous flux (lm)	9870
Luminous flux (Rated) (lm)	9870
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2050
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h 50Hz	96
Rated lumen maint. factor (%) at 6000 h 50Hz	94
Rated lumen maint. factor (%) at 8000 h 50Hz	93
Rated lumen maint. factor (%) at 12000 h 50Hz	91
Rated lumen maint. factor (%) at 16000 h 50Hz	90
Rated lumen maint. factor (%) at 20000 h 50Hz	89

ELECTRICAL DATA

Wattage (W)	100
Current (A)	1.2
Control gear required	Yes
Dimmable	No
Dimming method	Mains: leading / trailing edge
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	110

LIFETIME DATA

Average life (Nominal) (h)	30000
Average life (Rated) (h)	30000
Life T90	16000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	100
Rated survival factor (%) at 6000 h 50Hz	99
Rated survival factor (%) at 8000 h 50Hz	99
Rated survival factor (%) at 12000 h 50Hz	96
Rated survival factor (%) at 16000 h 50Hz	90
Rated survival factor (%) at 20000 h 50Hz	82

PHYSICAL DATA

Nominal Product Length (mm)	186
Nominal Product Diameter (mm)	78
Max. Lamp Diameter (mm) - D	78
Weight (kg)	0.069

PACKAGING

Product EAN number	5410288206929
Packaging single length / height (cm)	18.0
Packaging single width (cm)	7.5
Packaging single depth (cm)	7.5
DUN14 (outer)	15410288206926
Units per outer package	40
Packaging outer length / height (cm)	45.0
Packaging outer width (cm)	38.0
Packaging outer depth (cm)	39.0

SAFETY DATA

Lamp mercury content (mg)	14.4
Breakage cleaning instructions	Applicable

SYLVANIA

SHP-S 100W E40 SLV
0020692

Recommendation for disposal at end of life Applicable

Special purpose lamp No


Dry applications use only No

Suitable for household illumination No

Energy label



0020692

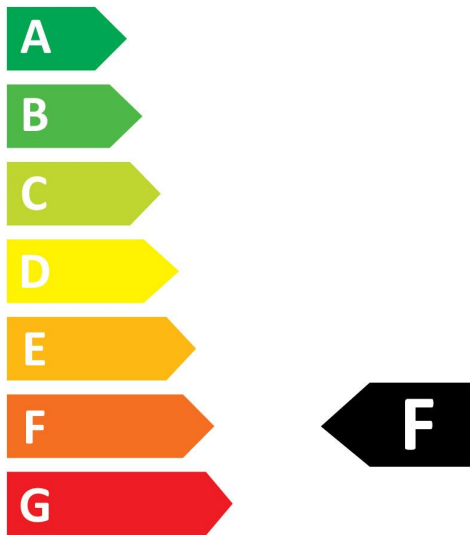


100
kWh/1000h



2019/2015



0020692

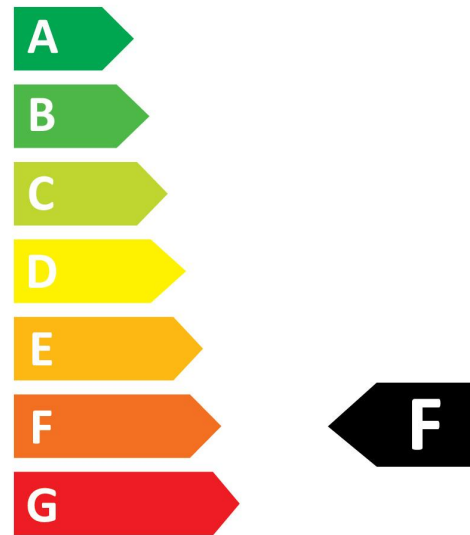

100
kWh/1000h



2019/2015

Light your world