





Data Sheet | Item Number: 734-166


THT male header; 1.0 x 1.0 mm solder pin; angled; 100% protected against mis-mating; Pin spacing 3.5 mm; 6-pole; light gray

<https://www.wago.com/734-166>

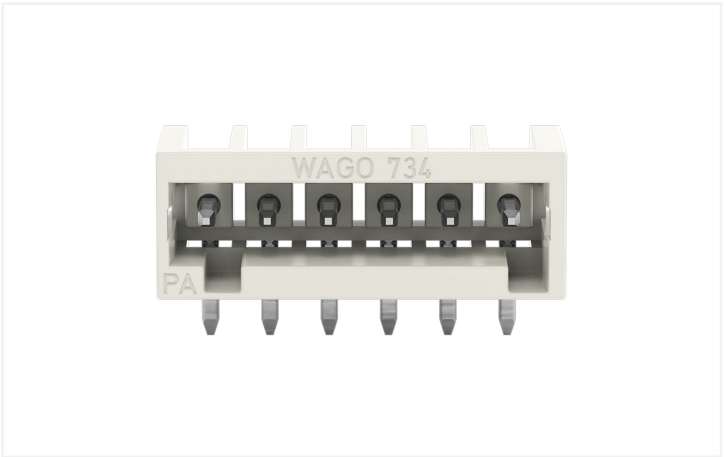

Color: ■ light gray

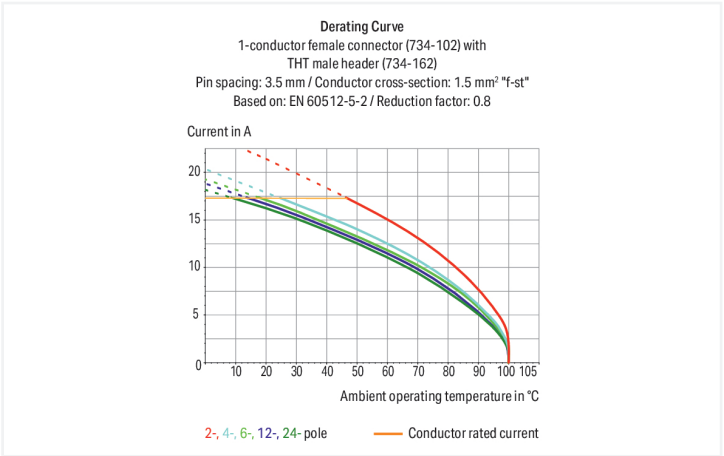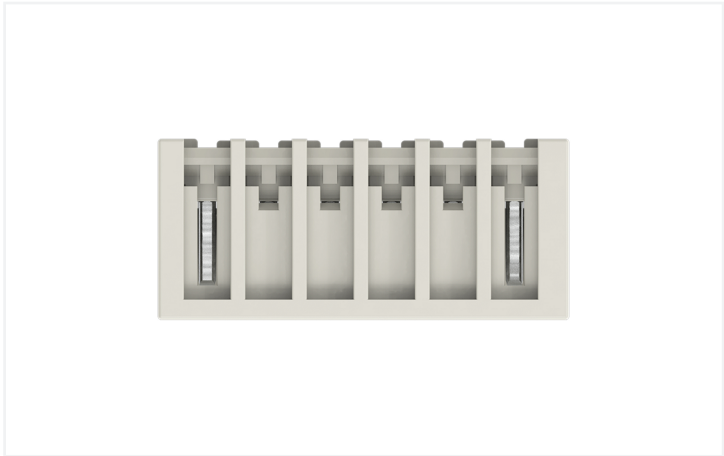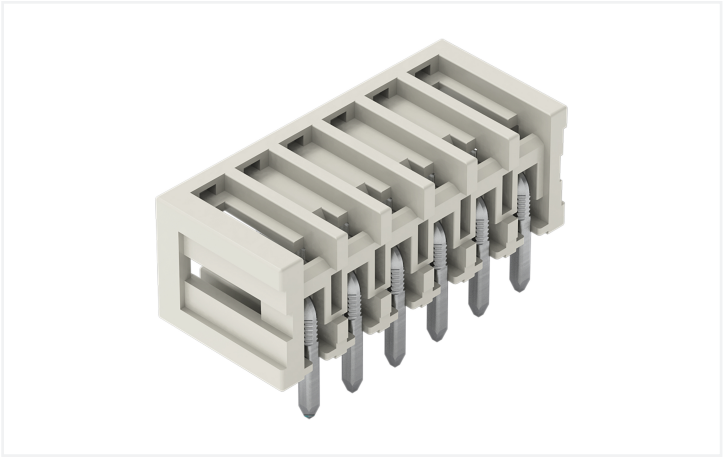

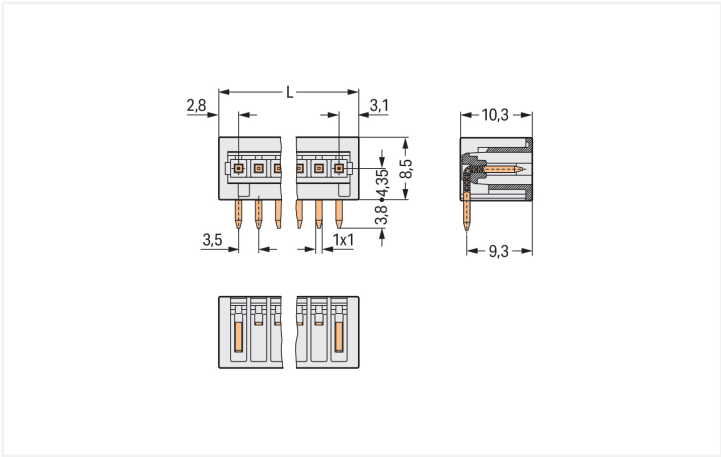

Dimensions in mm
L = (pole no. – 1) x pin spacing + 5.9 mm

Male connector, 734 Series, with 3.5 mm pin spacing

Our male connector (item number 734-166) simplifies electrical installations. Dimensions: (23.4 x 12.3 x 10.3) mm (width x height x depth).

The contact surface is coated with tin. The pcb connector is designed for THT soldering.

Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers 3.8 mm pin projection for male headers with straight solder pins Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data							
Ratings per		IEC/EN 60664-1		Approvals per		UL 1059	
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	300 V	-	300 V
Nominal voltage	160 V	160 V	320 V	Rated current	10 A	-	10 A
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				
Approvals per		CSA					
Use group	B	C	D				
Rated voltage	300 V	-	300 V				
Rated current	10 A	-	10 A				



Connection data		
Total number of potentials	6	Connection 1
Number of connection types	1	
Number of levels	1	
		Pole number 6

Physical data		
Pin spacing	3.5 mm / 0.138 inches	
Width	23.4 mm / 0.921 inches	
Height	12.3 mm / 0.484 inches	
Height from the surface	8.5 mm / 0.335 inches	
Depth	10.3 mm / 0.406 inches	
Solder pin length	3.8 mm	
Solder pin dimensions	1 x 1 mm	
Drilled hole diameter with tolerance	1.4 ^(+0.1) mm	

Mechanical data		
Variable coding	Yes	
Anti-rotation protection	Yes	

Plug-in connection		
Contact type (pluggable connector)	Male connector/plug	
Connector (connection type)	for PCB	
Mismating protection	Yes	
Mating direction to the PCB	0 °	

PCB contact		
PCB contact	THT	
Solder pin arrangement	over the entire male connector (in-line)	
Number of solder pins per potential	1	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	light gray	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Contact material	Electrolytic copper (E _{Cu})	
Contact Plating	Tin	
Fire load	0.023 MJ	
Weight	1.6 g	



Environmental requirements	
Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data	
Product Group	3 (Multi Conn. System)
PU (SPU)	100 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918872300
Customs tariff number	85366930000

Product Classification	
UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 8.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 734-166	

Documentation	
Additional Information	
Technical Section	03.04.2019 pdf 2027.26 KB 

CAD/CAE-Data	
CAD data	
2D/3D Models 734-166	
CAE data	
EPLAN Data Portal 734-166	
ZUKEN Portal 734-166	



PCB Design	
Symbol and Footprint via SamacSys 734-166	
Symbol and Footprint via Ultra Librarian 734-166	

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket

 Item No.: 734-106 1-conductor female connector; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; 1,50 mm²; light gray	 Item No.: 734-106/037-000 1-conductor female connector; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Lateral locking levers; 1,50 mm²; light gray	 Item No.: 734-106/037-000/033-000 1-conductor female connector; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Lateral locking levers; Strain relief plate; 1,50 mm²; light gray	 Item No.: 2734-1106/327-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; 1,50 mm²; light gray
 Item No.: 2734-1106/327-000/010-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; 1,50 mm²; light gray	 Item No.: 2734-1106/328-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Centered locking levers; 1,50 mm²; light gray	 Item No.: 2734-1106/328-000/334-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Centered locking levers; Strain relief plate; 1,50 mm²; light gray	 Item No.: 2734-1106/327-047 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; direct marking; 1,50 mm²; light gray
 Item No.: 2734-1106/327-9037 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; direct marking; 1,50 mm²; light gray	 Item No.: 2734-1106/038-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Lateral locking levers; 1,50 mm²; light gray	 Item No.: 2734-1106/038-000/334-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Lateral locking levers; Strain relief plate; 1,50 mm²; light gray	 Item No.: 2734-1106/327-000/334-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Strain relief plate; 1,50 mm²; light gray
 Item No.: 2734-106 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; 1,50 mm²; light gray	 Item No.: 2734-106/031-000 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; clamping collar; 1,50 mm²; light gray	 Item No.: 2734-106/037-000 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Lateral locking levers; 1,50 mm²; light gray	 Item No.: 2734-106/033-000 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Strain relief plate; 1,50 mm²; light gray
 Item No.: 734-536 THT female header; angled; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; 0.9 x 0.9 mm solder pin; light gray	 Item No.: 734-536/037-000 THT female header; angled; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Locking lever; 0.9 x 0.9 mm solder pin; light gray	 Item No.: 734-466 THT female header; straight; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; 0.9 x 0.9 mm solder pin; light gray	 Item No.: 734-466/037-000 THT female header; straight; Pin spacing 3.5 mm; 6-pole; 100% protected against mismatching; Locking lever; 0.9 x 0.9 mm solder pin; light gray




1.2 Optional Accessories
1.2.1 Coding
1.2.1.1 Coding

[Item No.: 734-159](#)
Coding key; to be snapped above top level; black

[Item No.: 734-130](#)
Coding key; to be snapped above top level; white

Installation Notes
Coding



Coding a male header – fitting coding key(s).