

Features

• OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM is a high efficacy low glare luminaire for office and education applications. Suitable for surface and suspended mounting. Size: 1129x200x45mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. DALI DT8 control for colour tuning. 3hr maintained emergency version. Tunable White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3200lm. Power consumption 33W. Luminaire efficacy 97lm/W. Lifespan: 60,000 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.


Product Overview

Product name	OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	97
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0


OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM
2023765

Luminous flux (emergency) (lm)	85
Total power consumption (W)	33
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237654
Warranty	5 years
Dimming method	DALI


Photometry

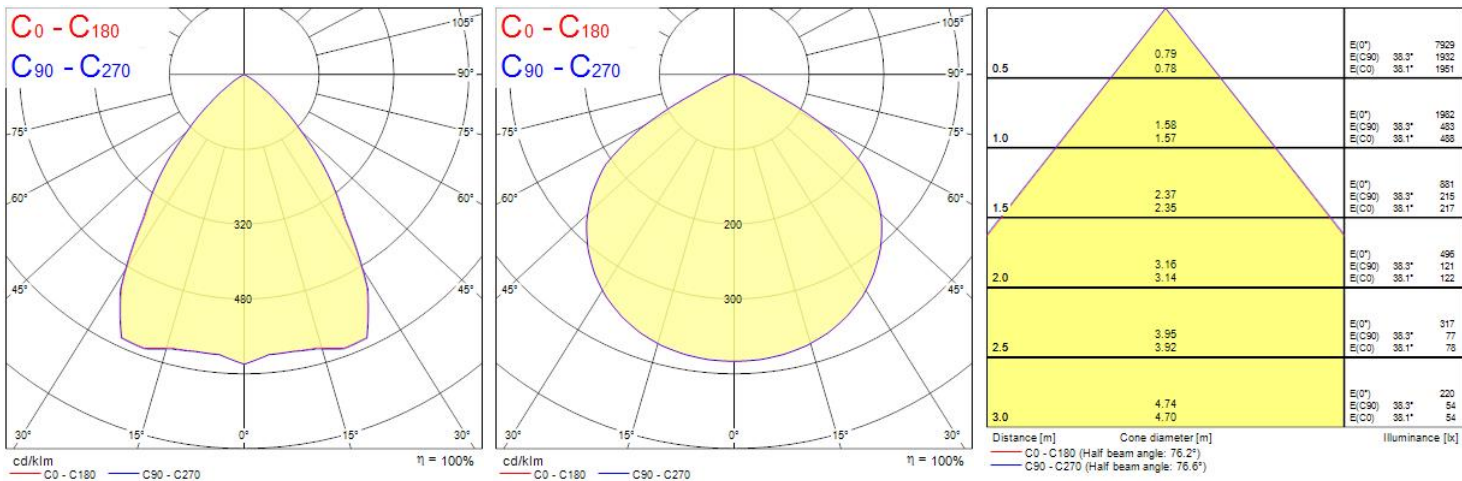

OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM
2023765

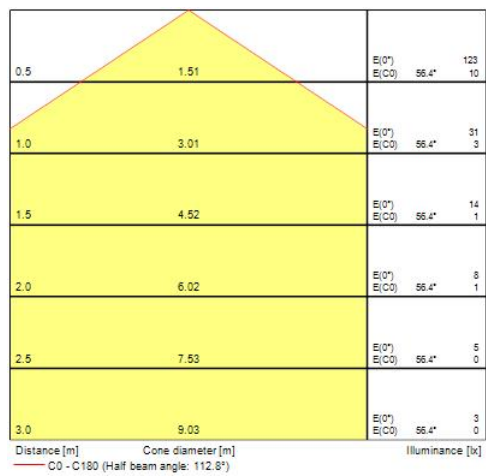

Technical drawings

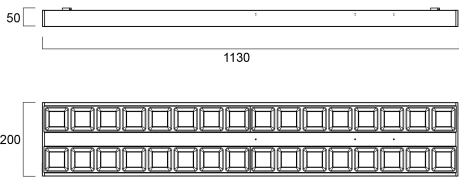

Data table

GENERAL DATA

Product name	OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C

OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM 2023765

Performance ambient temperature Tq (°C) 25

ETIM Class EC002892

Warranty 5 years

OPTICAL DATA

Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	97
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	85
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	33
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	600
Inrush Current (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	D

OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM 2023765

Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm ²)	2.5
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L90 B10	60000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1129
Nominal Product Width (mm)	200
Nominal Product Height (mm)	45
Weight (kg)	5.0

PACKAGING

Product EAN number	5025768237654
Packaging single length / height (cm)	117.0

OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM 2023765

Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (inner)	05025768237654
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	6.8

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No