
Product End of Life Instructions

Current transformer module with voltage output, ComPact NSX400/630, 400A rating, 3 poles


Representative of all current transformer module with voltage output from 400 to 630A





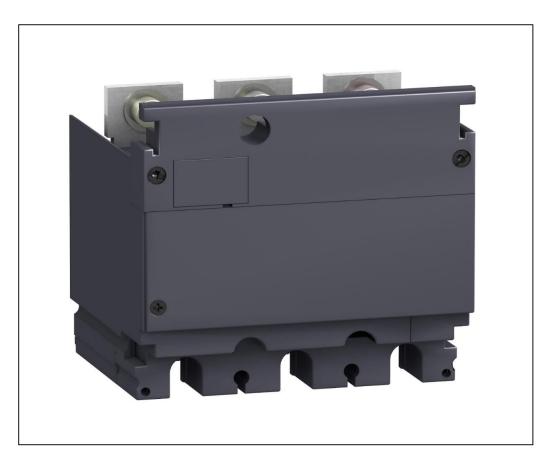

♦ End of Life Instructions

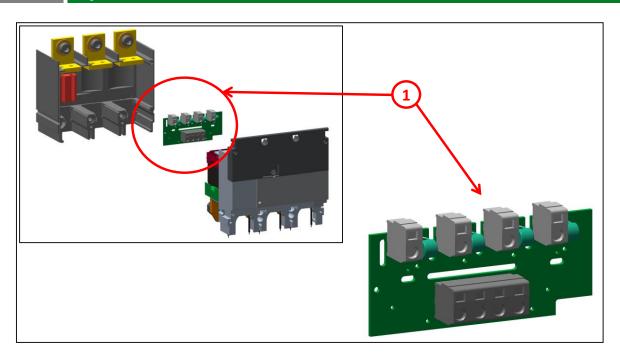

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm ²	22,7g	PCBA

Product description

Manufacturer identification	Schneider Electric Industries SAS	
Brand name	Schneider Electric	
Product function	This is an additional current transformer module of 400A rating with voltage measurement output for 3 poles ComPact NSX 400/630 devices. This module enables direct connection of a digital measurement device such as a Power Meter PM700 or PM800. The module is installed directly on the downstream circuit breaker power terminals. The current rating is 400A and the operational voltage is 530 VAC 50/60 Hz. The current at the secondary winding is 5A. The power consumption is 2VA. The class accuracy is 0.5. There is a class II insulation level between the front face and the power circuits. The protection degree is IP40.	
Product reference	LV432653	
Additional similar product references	LV432653 LV432654 LV432861 LV432862	
Total representative product mass	1851 g	
Representative product dimensions	130mm x 200mm x 150mm	
Accessories	No	
Date of information release	01/01/2025	

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
In case of special transportation: transportation method	No		
Recyclability potential	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).		

Schneider Electric Industries SAS

Country Customer Care Center http://www.se.com/contact

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVEOLI2412034 © 2023 - Schneider Electric – All rights reserved

01-2025