




VKEK-V-3P-BLUE: Synthetic Manifold 3X P Euroconus - Blue

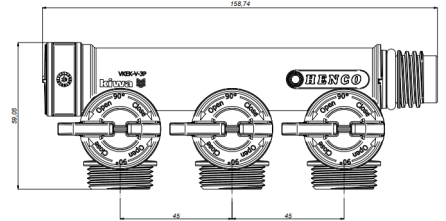

Commercial information

With the Henco Pro-Flow Manifold, you benefit from the following features:

- Multifunctional, self-aligning design and modular: 3 circuits, downward
- A separate pipe circuit for each tap point; this avoids connections in the floor.
- 100% corrosion-free.
- Change in dew point results in a lower risk of condensation in cold water systems.
- Maximum number of connections in a very short construction length.
- Improves the balance in a system.
- Single circuit shut-off is possible, simplifying maintenance.
- Suitable for both press and push-fit applications.
- Supply in 20 mm and 26 mm - Henco dimensions internal thread x external thread.
- Drinking water certified.
- Various group connections in 3/4" Eurocone possible: Plastic screw coupling Plastic press coupling Brass press coupling Plastic push-fit coupling.
- Available with 4 different coloured handles, making it easy to mark different applications.
- Not compatible with brass (Eurocone) screw couplings.

Basic unit dimensions

| | |
|------------|----------|
| Height | 58 mm |
| Length | 159 mm |
| Width | 52 mm |
| Net weight | 0.151 kg |

Certificates

Applications

Potable water, Heating, Cooling, Sanitary

Solutions

Building installations, Industry, Utility

Technical characteristics

| | | | |
|------------------------------------|------------------------------------|--------------------------------------|--------------------|
| Suitable for tap water | ✓ | Number of branches | 3 |
| Suitable for central heating water | ✓ | Number of branching directions | 3 |
| Suitable for cooling water | ✓ | Distance between offset | 45 Millimetre |
| Suitable for compressed air | ✗ | Max. medium temperature (continuous) | 95 Degrees celsius |
| Suitable for glycol | ✓ | Width | 158.74 Millimetre |
| Suitable for ethanol | ✗ | Height | 59.05 Millimetre |
| Suitable for gas | ✗ | Depth | 52.23 Millimetre |
| Mounting method | Surface mounting | Length distributor | 158.74 Millimetre |
| Model | Distributor/collector | | |
| Material | Plastic | | |
| Material quality | Polyphenylsulfone (PPSU) | | |
| Surface protection | Untreated | | |
| Shape | Throughflow with straight branches | | |
| System specific | ✓ | | |
| With fill- and drain valve | ✗ | | |
| With backflow safeguard | ✗ | | |
| With shut-off valve | ✓ | | |
| With de-aeration | ✗ | | |
| With wall-mounting bracket | ✗ | | |
| With mounting material | ✗ | | |
| With legs | ✗ | | |
| With adjustable floor legs | ✗ | | |
| With insulation | ✗ | | |
| KOMO certified | ✗ | | |
| Type approval according to BBR/EKS | ✗ | | |