


Walraven starQuick® Clamp (Grey)

(C0505)

for securing conduits and pipes to walls, floors, or ceilings

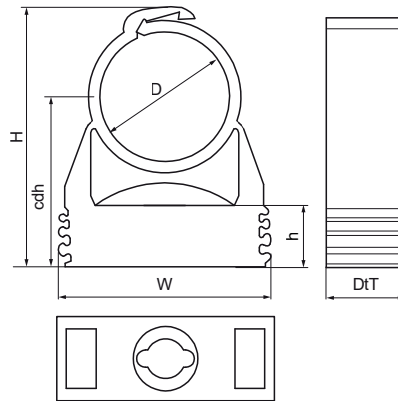

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	NRF Number	Outside Pipe Diameter	Fixing Hole	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz	Breaking Load Fbz
Reference Letter		D	FH	H	W	DtT	cdh	h	G	F _{0,z}	F _{b,z}
Unit description		mm	mm	mm	mm	mm	mm	mm		N	N
0854010	3484255	10 - 12	8	34	29	17	24	10.6	None	170	500
0854012	3484256	12 - 14	8	36	29	17	25	10.6	None	180	550
0854015	3484257	14 - 16	8	36	29	17	25	10.6	None	200	600
0854018	3484258	16 - 20	8	40	29	17	27	10.6	None	230	700
0854022	3484259	20 - 23	8	43	29	17	28	10.6	None	270	800
0854028	3484261	24 - 28	8	50	40	18	32	10.6	None	280	850
0854031	3484262	28 - 32	8	55	40	17	36	10.6	None	300	900
0854035	3484263	32 - 35	8	59	43	17	37	10.6	None	330	1,000
0854038	3484264	35 - 40	8	68	47	17	44	12.1	None	330	1,000
0854042	3484265	40 - 44	8	70	52	17	44	12.1	None	330	1,000
0854050	3484266	44 - 50	8	79	57	17	50	12.1	None	330	1,000
0854054	3484267	48 - 55	8	82	63	17	50	12.1	None	330	1,000
0854063	3484268	59 - 65	8	95	74	20	57	12.1	None	500	1,500