

### Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, SylSmart Connected SSA01D , 20W; 2350lm; 118lm/W; 3000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.


### Product Overview

Product name	INSAVER SLIM UGR19 IP44 SSA01D 205 2350lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	118
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II

## INSAVER SLIM UGR19 IP44 SSA01D 205 2350lm 830 0030488

Control gear type	LED driver constant current
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288304885
Warranty	5 years
Useful luminous flux (#use)	2350
Dimming method	SylSmart SSA

### Photometry

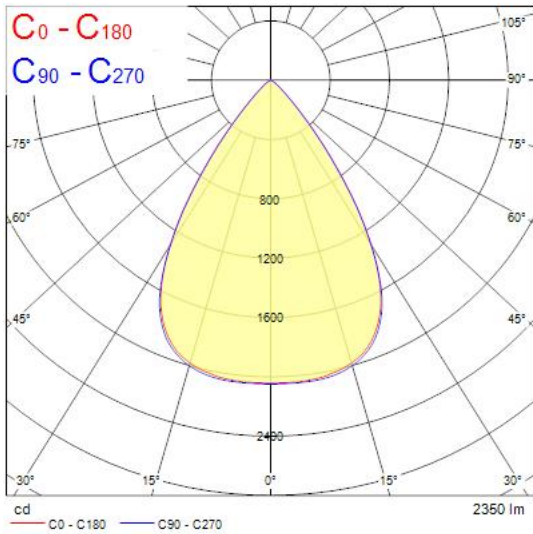

### Technical drawings

