



Product End of Life Instructions

EVlink ProAC 7.4kwT2STE6mARCDAsiMNXMID



End of Life Instructions

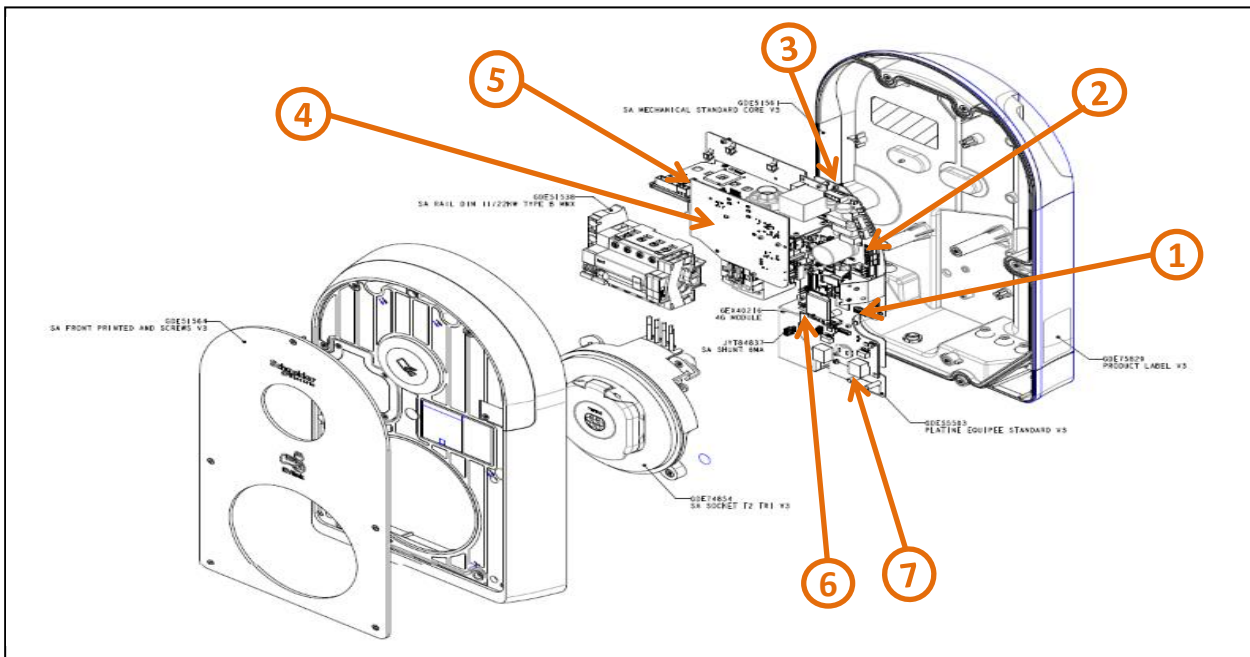

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm ²	26g	PCBA including soldering parts
To be depolluted	2	Electronic Board (Power) > 10cm ²	325.28g	PCBA including electrolyte capacitors
To be depolluted	3	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	25g	Aluminum electrolyte capacitors
To be depolluted	4	Electronic Board (Communication) > 10cm ²	76.85g	PCBA including soldering parts
To be depolluted	5	Electronic Board (Power) > 10cm ²	127.22g	PCBA including electrolyte capacitors
To be depolluted	6	Electronic Board (Communication) > 10cm ²	135.95g	PCBA including soldering parts
To be depolluted	7	Other battery	26g	Coin-type Lithium Battery

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	EVlink Pro AC is designed to enable highly reliable, flexible and sustainable smart charging for multi dwelling housing and buildings. Charging mode is mode 3, Charging type is normal. It includes one RFID control system, one or two types sockets, RCD protect module and 4G communication module etc. The elements used for connecting the station to the mains grid and to the monitoring and communication network are excluded.
Product reference	EVB3S07N4EAM
Total representative product mass	7624.582 g
Representative product dimensions	530mm x 317mm x 152mm
Accessories	Pedestal, Cable locker, TIC communication card, Metal kit
Date of information release	2024/02/27

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment, for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	22%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO' DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

ENVEOLI2202024

© 2023 - Schneider Electric – All rights reserved

2024/02/28