

Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, SylSmart Connected SSA01D, 20W; 2500lm; 125lm/W; 4000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.


Product Overview

Product name	INSAVER SLIM UGR19 IP44 SSA01D 205 2500lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II

INSAVER SLIM UGR19 IP44 SSA01D 205 2500lm 840 0030489

Control gear type	LED driver constant current
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288304892
Warranty	5 years
Useful luminous flux (#use)	2500
Dimming method	SylSmart SSA

Photometry

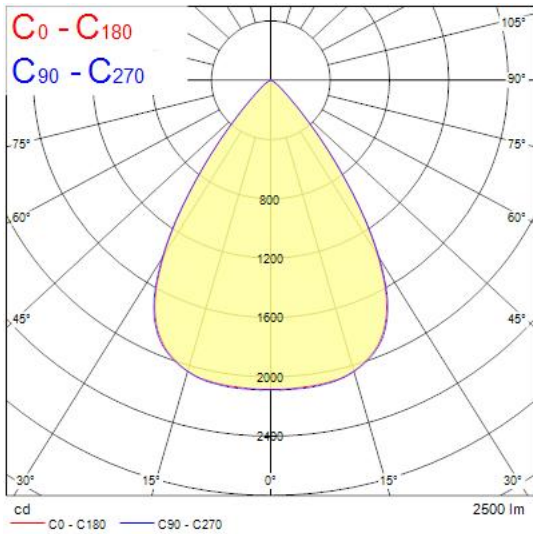

Technical drawings

