

# Concord

## OPTIX RECESSED 1200X300 1L 4000K ALU 2023656



### Features

- OPTIX RECESSED 1200X300 1L 4000K ALU is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 1200x300 mm. Aluminium plastic extra low glare optics in 1 line configuration. White RAL9016 fixture body. Constant current driver. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 24.5W. Luminaire efficacy 139lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

### Product Overview


Product name	OPTIX RECESSED 1200X300 1L 4000K ALU
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	139
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	24.5
Electrical protection	Class I

# Concord


## OPTIX RECESSED 1200X300 1L 4000K ALU 2023656

Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768236565
Warranty	5 years
Dimming method	N/A

### Photometry

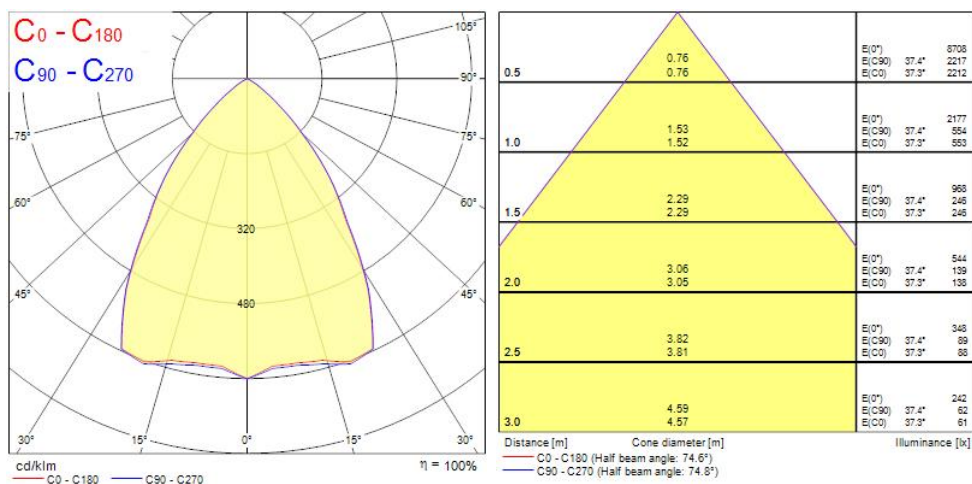

### Technical drawings

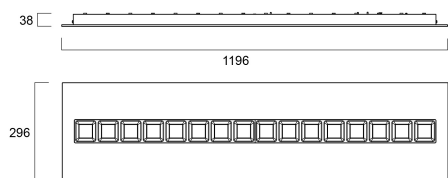

### Data table

# Concord

## OPTIX RECESSED 1200X300 1L 4000K ALU 2023656

### GENERAL DATA

Product name	OPTIX RECESSED 1200X300 1L 4000K ALU
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	139
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	24.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	8
Electrical protection	Class I

# Concord

## OPTIX RECESSED 1200X300 1L 4000K ALU 2023656

Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	500
Inrush Current (A)	25
Inrush Duration ( $\mu$ s)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	20
Max. products per 13A C Breaker	30
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	47
Max. products per 10A B Breaker	10
Max. products per 13A B Breaker	15
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	24
Connectable conductor cross section - Min (mm <sup>2</sup> )	2.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

### LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

### PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized

# Concord

## OPTIX RECESSED 1200X300 1L 4000K ALU 2023656

Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Nominal Product Height (mm)	38
Weight (kg)	5.0

### PACKAGING

Product EAN number	5025768236565
Packaging single length / height (cm)	124.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (inner)	05025768236565
Units per outer package	1
Packaging outer length / height (cm)	124.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	32.0

### SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No