



### Features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + MPO diffuser, Direct Light Distribution, Luminaire Dimensions: 1196x296x52mm, Sylvania White body colour, IP20, IK07, DALI Dimmable, Low LED flicker (+/-5%), Neutral White (4000K), LED Colour Temperature, 3761lm, 31W, 121lm/W, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m<sup>2</sup>, Lifespan: 96,000 hours L80B20, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.


### Product Overview

<b>Product name</b>	RANA NEO 3700LM REC 1200x300 840 DALI 1L WHITE
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture luminous flux (lm)</b>	3761
<b>Luminaire efficacy (lm/W)</b>	121
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 18
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	31
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)

## RANA NEO 3700LM REC 1200x300 840 DALI 1L WHITE 0052591

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288525914
Warranty	5 years

### Photometry

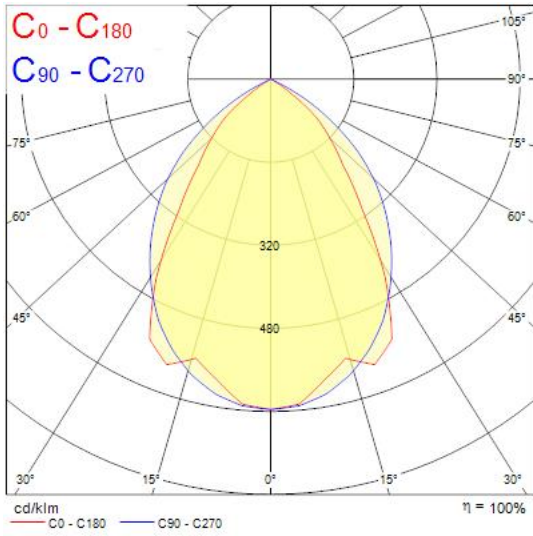

### Technical drawings

