


TRONIX

213-502

Paste Anywhere Human Motion Sensor Switch

Sensor

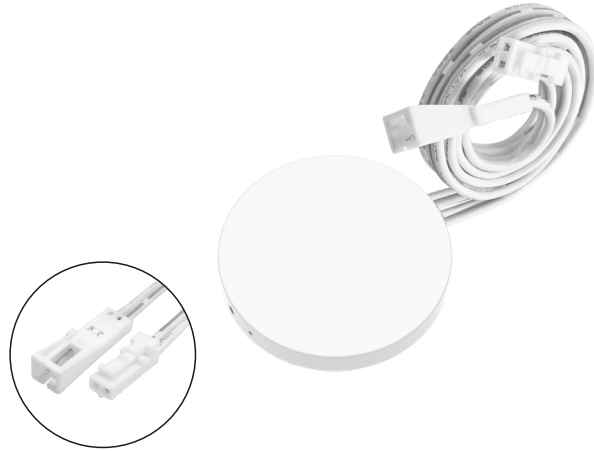


CE RoHS



Features

- Paste anywhere human motion sensor switch, 5-24VDC power supply, output connected to low voltage LED strip.
- Built-in 5.8GHz motion-detecting radar module, can detect human movement through non-metallic materials such as wood, plastic, glass and acrylic.
- When detected human movement, the light will turn on; when human movement is not detected, the light will turn off after the delay is over.
- Sensor switch detection distance: 0.5-5m, detection angle: 120°.
- 5 levels of delayed light off time can be set (10s, 30s, 60s, 180s, 300s).
- 4 levels of sensor distance can be set (5m, 3m, 1.5m, 0.5m).
- Ultra-thin design, no need to cut holes, random paste installation, can be hidden.
- Apply to light illumination of cabinets, closets, wine cabinets, staircases, corridors, hallways, and so on.

Dimension




Back



Technical Parameters

Input and Output		Environment and Protection		Safety and EMC	
Input voltage	5-24VDC	Operation temperature	Ta: -20°C ~ +55°C	Safety standard	EN 61347-1/-2 EN 62493
Output voltage	5-24VDC	Protection	Reverse polarity	EMC standard	EN IEC 55015/ EN IEC 61547
Output current	3A	Package		Certification	CE RoHs
Output power	15-72W	Size	90x130mm	Warranty	5 years
PWM Frequency	2000Hz	Gross weight	0.036kg		

Wiring Diagram

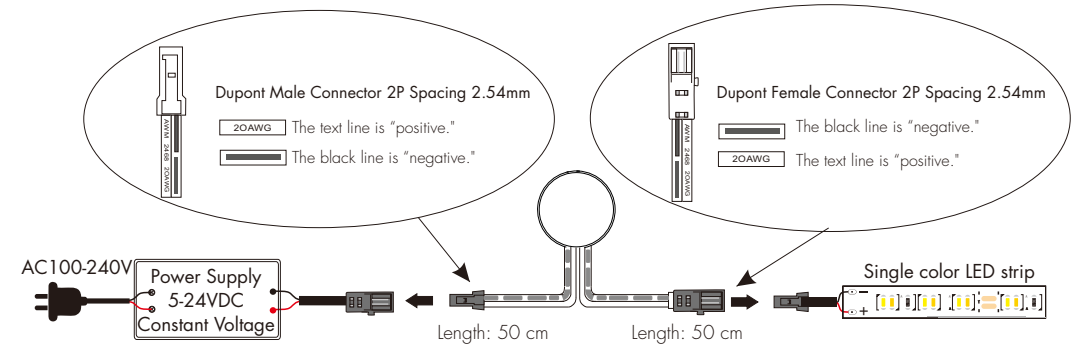

Set Key and Indicator Function

When the light is on, the indicator is brighter; when the light is off, the indicator is less bright.

The factory default light off delay time is 30s and the sensing distance is 3m.

Please change the light off delay time and sensing distance according to the actual installation requirements by short press or long press the set key with the equipped pin.

Set the light off delay time:

Short press the set key to switch 5 levels of light off delay time in sequence.

When the light off delay time is set to 10s, the LED indicator blinks 1 time;

When the light off delay time is set to 30s, the LED indicator blinks 2 times;

When the light off delay time is set to 60s, the LED indicator blinks 3 times;

When the light off delay time is set to 180s, the LED indicator blinks 4 times;

When the light off delay time is set to 300s, the LED indicator blinks 5 times;

Note: When the sensor switch is powered up, the LED indicator will blink the corresponding number of times according to the current off delay time setting value.

Set the sensor distance:

Long press the set key for 5-20s to set 4 levels of sensing distance in sequence.


Long press for 5s, set the sensor distance to 5m, the LED indicator blinks 1 time;

Long press for 10s, set the sensor distance to 3m, the LED indicator blinks 2 times;

Long press for 15s, set the sensor distance to 1m, the LED indicator blinks 3 times;

Long press for 20s, set the sensor distance to 0.5m, the LED indicator blinks 4 times;

Note: When long press, the LED indicator is off and will blink the corresponding number of times at 5s, 10s, 15s, and 20s moments.



Set whether to gradually turn on or off the light:


Hold down the Set key at the moment of power-on, at 5s, the indicator light flashes 3 times, at this point, release the key to set turn on or off the light gradually. at 10s, the indicator light flashes 6 times, at this point, release the key to set turn on or off the light without a gradient. The factory default turn on or off the lights gradually.

Memory function:

After power failure and turn on again, the device automatically restores the setting parameters before power failure.

Sensor Switch Installation

Open installation:

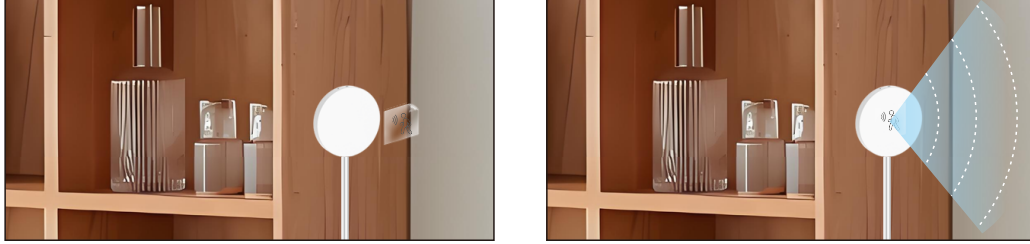

Stick the back of the sensor switch to the board with 3M adhesive, and attach the indicator sticker to the front.

Concealed installation:




Stick the front side of the sensor switch to the back of the board with 3M adhesive, and attach the indicator sticker at the corresponding position on the front side of the board. The sensing signal can penetrate about 50mm of wood boards and non-metallic materials, and there is no attenuation at a sensing distance of 0.5 to 5 meters.

Installation Precautions:

1. Please use 3M adhesive to install the sensor switch anywhere or on the back of non-metallic materials such as wood, plastic, glass, acrylic, etc.
2. The sensor switch is not affected by ambient temperature, humidity, light, etc., and has strong anti-interference capability.
3. The sensor head should be installed in the correct direction and angle.
When installing on the wall, it is recommended to install horizontally with a height of about 1.2-1.8m;
When installing on the ceiling, it is recommended to install vertically with a height of about 3m.
4. When installing multiple sensor switches, try to keep each sensor switch placed parallel to each other.
5. When installing, try to avoid facing large metal equipment or pipes to avoid signal interference.
6. Ensure that the sensor switch is not near or obstructed by high density materials (e.g., metal, concrete walls, etc.).
These materials can degrade or block the microwave signal and cause false triggering.

Sensor Switch Application

• Individual switch application




It is recommended to set the delayed light off time of the sensor switch to 30s or 60s. Realize that the light on when people come, and the light off when people leave.

• Multiple switch application



For multiple switch applications, it is recommended to set the delayed light off time of all sensor switches to 10s. Realize sequential switching control of multiple lights in the direction of human movement. The installation distance between two sensor switches should be at least 5m to avoid mutual interference.

• Staircase lighting application



For staircase installation application, it is recommended to install two sensor switches on the upper and lower sides of the staircase respectively. And set the delay off time of the sensor switch to 30s or 60s to realize the up/down staircase light on/off control.