Product End of Life Instructions

PowerLogic ION9000









🏚 Potential disassembly risks



End of Life Instructions

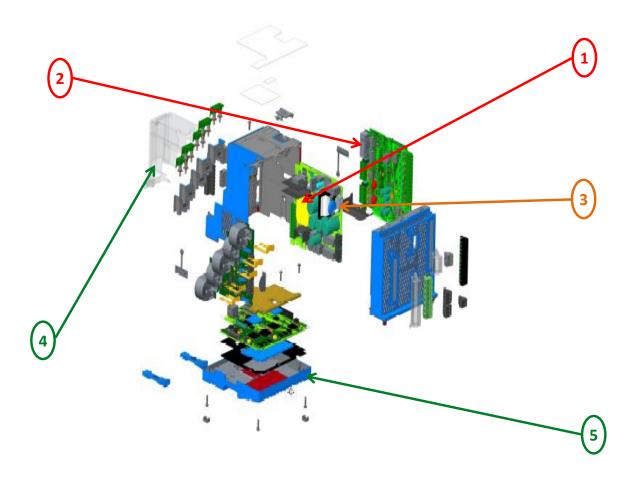

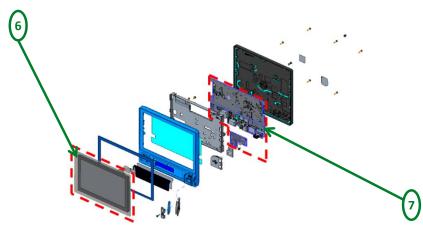

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	BATTERY 3V 120mAh	1.5	
To be depolluted	2, 3 & 7	PCBA, PM9000 CPU PCBA, PM9000 PSU PCBA, PM9000 IO PCBA RMD display	1236.25	
To be depolluted	6	LCD device	400	
Other		Cables	131.34	
Other		Metals	484.82	
Other		Plastics	819.37	
Other	4	TERMINAL COVER, CT INPUTS	5.47	
Other	5	REAR COVER METSERD192	122.38	

Product description

Manufacturer identification	Schneider Electric Industries SAS	
Brand name	Schneider Electric	
Product function	The Power Meter measures, records, communicates. It can be on din-rail or panel mounted. The meter can be powered by: • AC at 50/60 Hz: 90 to 480 V ± 10% • AC at 400 Hz: 90 to 120 V ± 10% • DC: 110 to 480 V DC ± 15% The functionalities and accuracy: Power meters monitor Power (Voltage, Current, Power, Energy) and Power quality (harmonics, Sag/swell, Transient). Data can be recorded (fast recording) to be uploaded on Edge software Most of meters have a display to configure and visualize the data Communication with Edge software is also available.	
Product reference	METSEION95040	
Additional similar product references	METSEION95040 METSEION92043 METSEION92044 METSEION92040 METSEION92030 METSEION95030 METSEION93030 METSEION93040 METSEION92830 METSEION92840 METSERD192 METSE9CTHWK METSE9HWK METSERD192HWK METSE9USBK METSE9B2BMA	
Total representative product mass	3201.13 g	
Representative product dimensions	136mm x 160mm x 160mm	
Accessories	Connectors & ethernet cables	
Date of information release	12/2020	

(19) Additional information

Legal information

This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Recyclability potential

21%

Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVEOLI1801009_V2

© 2017 - Schneider Electric - All rights reserved

12/2020