

## RANA NEO Recessed 1200 SylSmart

RANA NEO 3500LM REC 1200x300 830 SSC EM 1L WHITE  
0052598



### PRODUCT OVERVIEW

Product name	RANA NEO 3500LM REC 1200x300 830 SSC EM 1L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Warranty	5 years
Fixture luminous flux (lm)	3572
Luminaire efficacy (lm/W)	108
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	33
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288525983

### DATA TABLE

#### General data

Product name	RANA NEO 3500LM REC 1200x300 830 SSC EM 1L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting

## RANA NEO Recessed 1200 SylSmart

RANA NEO 3500LM REC 1200x300 830 SSC EM 1L WHITE

0052598

Operating temperature range (°C)	-5°C...+25°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	3572
Luminaire efficacy (lm/W)	108
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	33
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	600
Inrush Current (A)	20
Inrush Duration (µs)	25
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	57
Max. products per 20A B Breaker	68

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	96000

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Weight (kg)	5.5

### Packaging

## RANA NEO Recessed 1200 SylSmart




RANA NEO 3500LM REC 1200x300 830 SSC EM 1L WHITE  
0052598

Single packaging type	Carton
Product EAN number	5410288525983
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (outer)	05410288525983
Packaging outer length / height (cm)	124.5

### Safety data

Optimal operating condition (°C)	-5-25
----------------------------------	-------

## PHOTOMETRY

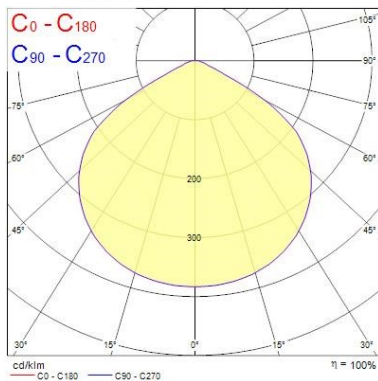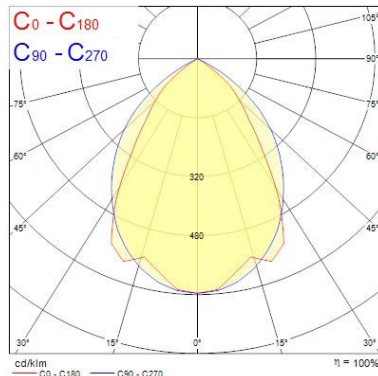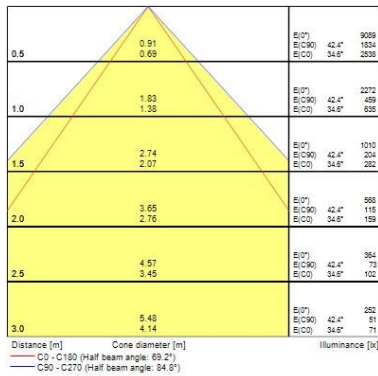

## TECHNICAL DRAWINGS

