

Features

- QUADRO 600x600 830 MP Unique stylish recessed modular LED luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75° beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 3000K (Warm White), max system power: 34W, max fixture output: 4500lm, efficacy at max output 132lm/W, max efficacy 140lm/W @ 15W, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 88,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non-dimmable 8-step SELV Multipower driver (15W 2100lm, 18W 2500lm, 21W 2950lm, 24W 3300lm, 27W 3650lm, 30W 3950lm, 32W 4250lm, 34W 4500lm), electrical protection: Class II. Ingress protection IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,20kg.


Product Overview

Product name	QUADRO 600x600 830 MP
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Office, Education
ETIM Class	EC002892
E-number FI	4279447
Fixture luminous flux (lm)	4500


QUADRO 600x600 830 MP 0044700

Luminaire efficacy (lm/W)	132
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288447001
Warranty	5 years
Useful luminous flux (#use)	4500
Dimming method	N/A

Photometry

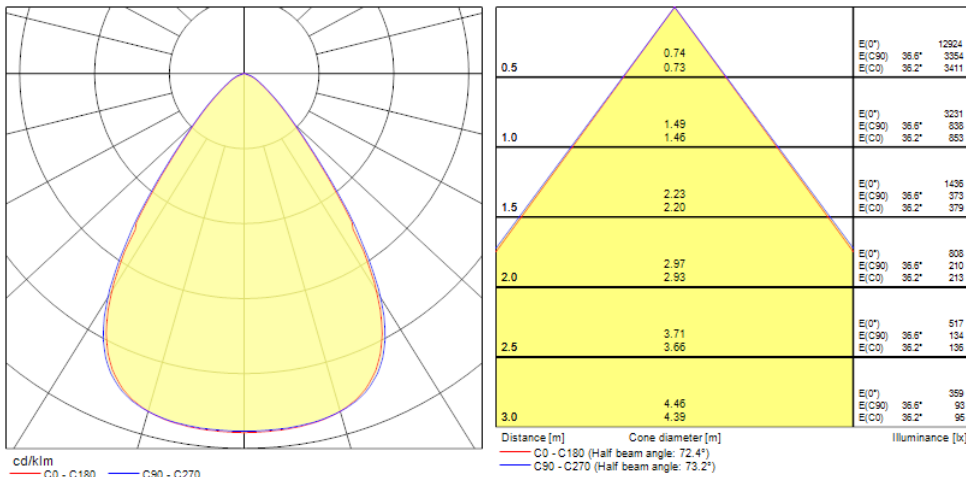

Technical drawings

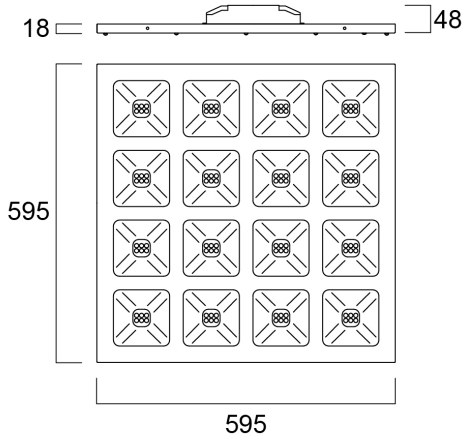

Data table

GENERAL DATA

Product name	QUADRO 600x600 830 MP
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Office, Education
Operating temperature range (°C)	-10°C...+45°C
ETIM Class	EC002892
E-number FI	4279447
Warranty	5 years

OPTICAL DATA

Useful luminous flux (#use)	4500
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	3000

QUADRO 600x600 830 MP 0044700

Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	34
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast multiwatt
No. Of switching cycles before premature failures	>25000
Dimmable	No
Dimming method	N/A
Drive current (mA)	900
Inrush Current (A)	25
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	34
Max. products per 13A C Breaker	42
Max. products per 16A C Breaker	56
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	20

QUADRO 600x600 830 MP 0044700

Max. products per 13A B Breaker	26
Max. products per 16A B Breaker	33
Max. products per 20A B Breaker	41
Connectable conductor cross section - Max (mm ²)	1.5

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Other
Diffuser material	None
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	18
Weight (kg)	2.669

PACKAGING

Product EAN number	5410288447001
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	66.0
DUN14 (outer)	15410288447008
Units per outer package	48
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	81.0
Packaging outer depth (cm)	67.5

SAFETY DATA

Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

QUADRO 600x600 830 MP
0044700



Light your world