

### Features

- QUADRO 600x600 830 DALI Unique stylish recessed modular LED luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75° beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 3000K (Warm White), max system power: 34W (900mA), max fixture output: 4500lm, efficacy at max output 132lm/W, max efficacy 140lm/W @ 15W, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 88,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, SELV DALI driver, electrical protection: Class II. Ingress protection IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,20kg.


### Product Overview

<b>Product name</b>	QUADRO 600x600 830 DALI
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting, Suspended
<b>General application</b>	Office, Education
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4279451
<b>Fixture luminous flux (lm)</b>	4500
<b>Luminaire efficacy (lm/W)</b>	132


## QUADRO 600x600 830 DALI 0044702

Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288447025
Warranty	5 years
Useful luminous flux (#use)	4500
Dimming method	DALI-2

## Photometry

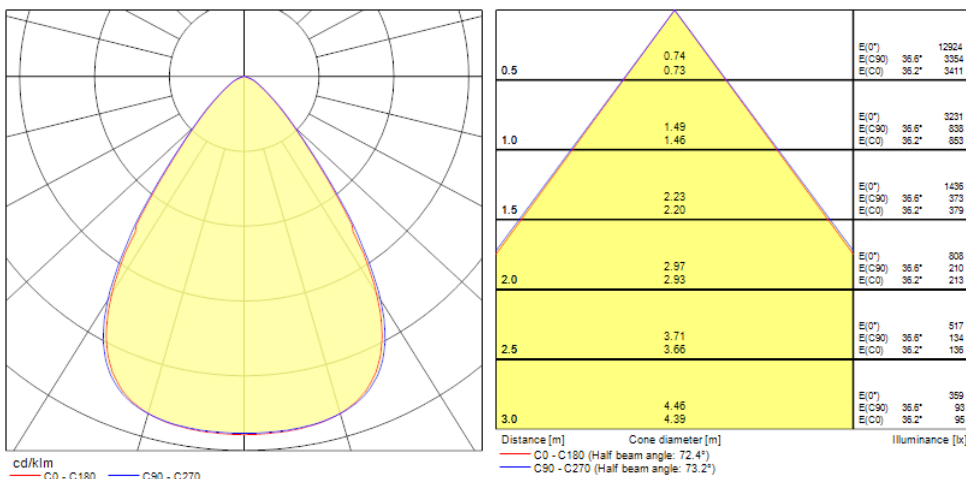

### Technical drawings

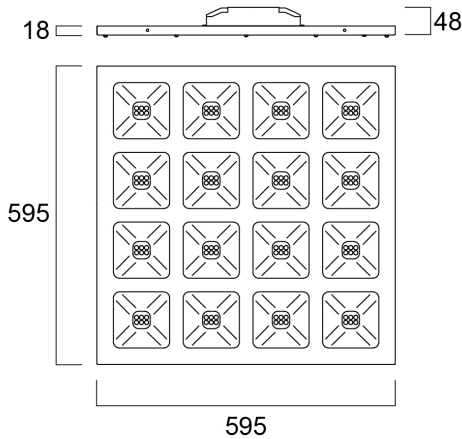

### Data table

#### GENERAL DATA

Product name	QUADRO 600x600 830 DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Office, Education
Operating temperature range (°C)	-10°C...+45°C
ETIM Class	EC002892
E-number FI	4279451
Warranty	5 years

#### OPTICAL DATA

Useful luminous flux (#use)	4500
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	3000

## QUADRO 600x600 830 DALI 0044702

Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	34
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast multiwatt
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	900
Inrush Current (A)	5.5
Inrush Duration ( $\mu$ s)	50
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	37
Max. products per 16A C Breaker	59
Max. products per 16A B Breaker	59
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

### PHYSICAL DATA

## QUADRO 600x600 830 DALI 0044702

Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Other
Diffuser material	None
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	18
Weight (kg)	2.669

### PACKAGING

Product EAN number	5410288447025
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.4
Packaging single depth (cm)	66.9
DUN14 (outer)	15410288447022
Units per outer package	48
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	81.0
Packaging outer depth (cm)	67.5

### SAFETY DATA

Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No