
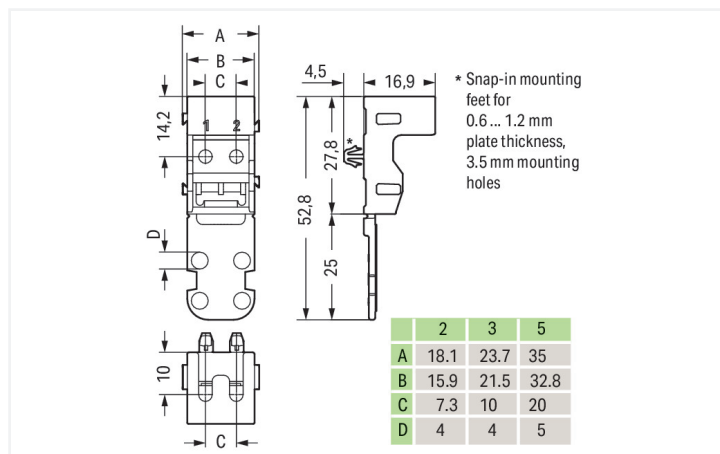


<https://www.wago.com/221-513/000-004>

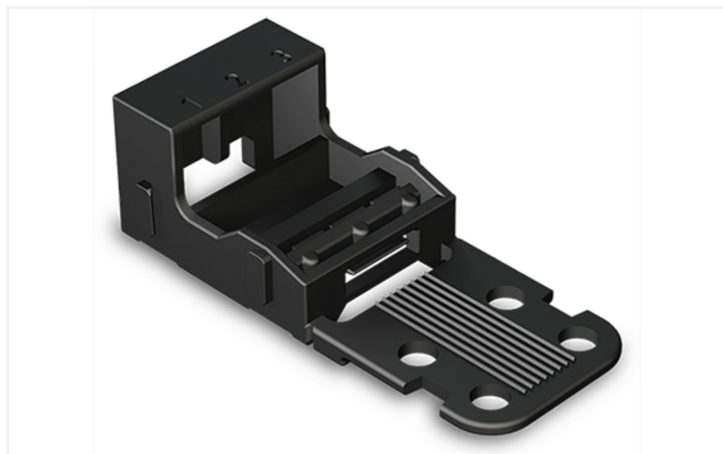

Dimensions in mm

Width	23.7 mm / 0.933 inches
Height	21.4 mm / 0.843 inches
Height from the surface	16.9 mm / 0.665 inches
Depth	52.8 mm / 2.079 inches

Mounting type	with snap-in mounting foot for horizontal mounting
Suitable	for 3-wire connectors (4 mm²)

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.106 MJ
Weight	3.6 g



Commercial data		
PU (SPU)		50 (10) pcs
Packaging type		Box
Country of origin		CN
GTIN		4055143640916
Customs tariff number		39269097900

Product Classification		
UNSPSC		39121421
eCl@ss 10.0		27-14-11-92
eCl@ss 9.0		27-14-11-92
ETIM 9.0		EC002848
ETIM 10.0		EC002848
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance		
221-513/000-004		

Documentation			
Bid Text			
221-513/000-004	19.02.2019	xml 2.74 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models		ZUKEN Portal	
221-513/000-004		221-513/000-004	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip




Item No.: 210-833
Marking strips; 25 m on roll; 6 mm wide;
plain; Self-adhesive; white

Installation Notes



Inserting a connector into the mounting carrier.



Removing a connector from the mounting carrier.

Conductor termination



Inserting a conductor.



Horizontal screw mounting



Vertical screw mounting



Horizontal mounting via snap-in foot



Vertical mounting via snap-in foot

Strain relief




Use a cable tie to secure the conductors to the strain relief plate.



The strain relief plate can be removed.

Testing



Testing a connector mounted on the carrier via test slot.

Application



Connecting a light to the mains.

Marking



Labeling the mounting carrier.