

### Features

- QUADRO 600x600 840 DALI Unique stylish recessed modular LED luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75° beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 4000K (Neutral White), max system power: 34W (900mA), max fixture output: 4650lm, efficacy at max output 137lm/W, max efficacy 153lm/W @ 15W, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 88,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, SELV DALI driver, electrical protection: Class II. Ingress protection IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,20kg.


### Product Overview

<b>Product name</b>	QUADRO 600x600 840 DALI
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting, Suspended
<b>General application</b>	Office, Education
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4279449
<b>Fixture luminous flux (lm)</b>	4650
<b>Luminaire efficacy (lm/W)</b>	137

## QUADRO 600x600 840 DALI 0044703

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288447032
Warranty	5 years
Useful luminous flux (#use)	4650
Dimming method	DALI-2

### Photometry

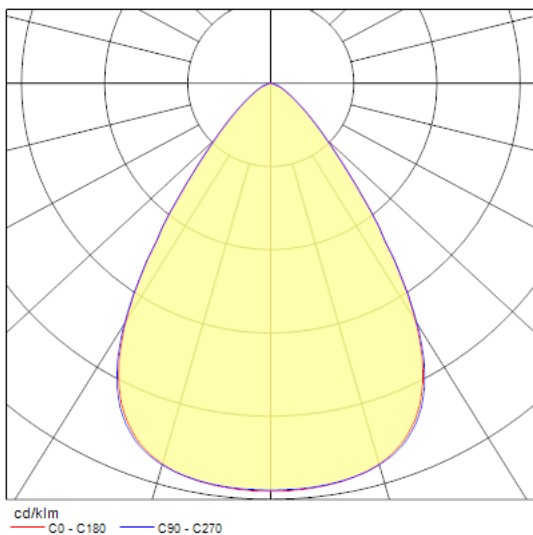

### Technical drawings

