

Features

- QUADRO 1200x300 840 DALI Unique stylish recessed modular LED luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75° beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 4000K (Neutral White), max system power: 34W (900mA), max fixture output: 4650lm, efficacy at max output 137lm/W, max efficacy 153lm/W @ 15W, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 88,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, SELV DALI driver, electrical protection: Class II. Ingress protection IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,40kg.


Product Overview

Product name	QUADRO 1200x300 840 DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Office, Education
ETIM Class	EC002892
E-number FI	4279457
Fixture luminous flux (lm)	4650
Luminaire efficacy (lm/W)	137


QUADRO 1200x300 840 DALI 0044711

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288447117
Warranty	5 years
Useful luminous flux (#use)	4650
Dimming method	DALI-2

Photometry

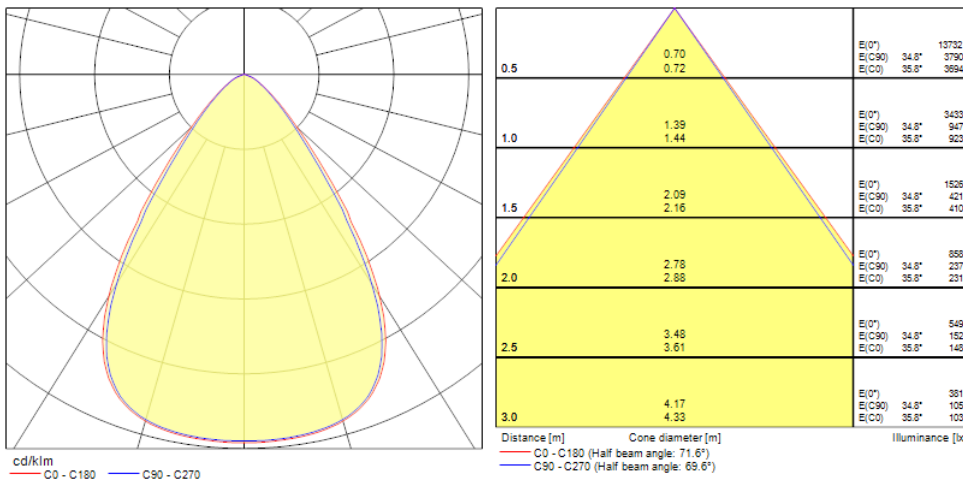

Technical drawings

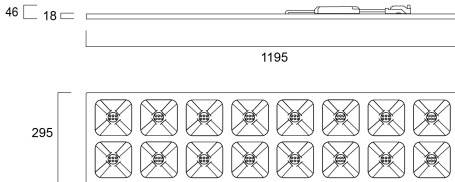

Data table

GENERAL DATA

Product name	QUADRO 1200x300 840 DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Office, Education
Operating temperature range (°C)	-10°C...+45°C
ETIM Class	EC002892
E-number FI	4279457
Warranty	5 years

OPTICAL DATA

Useful luminous flux (#use)	4650
Fixture luminous flux (lm)	4650
Luminaire efficacy (lm/W)	137
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Distribution type	Symmetric

QUADRO 1200x300 840 DALI 0044711

Glare control	< 16
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	34
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast multiwatt
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	900
Inrush Current (A)	5.5
Inrush Duration (μ s)	50
Glow Wire Test ($^{\circ}$ C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	37
Max. products per 16A C Breaker	59
Max. products per 16A B Breaker	59
Connectable conductor cross section - Max (mm ²)	2.5

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Other

QUADRO 1200x300 840 DALI 0044711

Diffuser material	None
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	18
Weight (kg)	3.717

PACKAGING

Product EAN number	5410288447117
Packaging single length / height (cm)	120.0
Packaging single width (cm)	3.4
Packaging single depth (cm)	36.9
DUN14 (outer)	15410288447114
Units per outer package	4
Packaging outer length / height (cm)	121.5
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	38.0

SAFETY DATA

Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No