


Start Highbay
START Highbay IP65 1-10V 19000lm 840 WB
0039348



Product features



- START Highbay, includes 1 m cables, black aluminium housing, 19,500 Lm, 150 W, 130 Lm/W, 4000 K, drive current: 3210 mA, CRI 80, 90° beam angle, 1-10 V dimmable, IP65, IK08, 54,000 hrs (L80/B50), (D x H) 296 x 177 mm, 1 m mains cable, 1 m control cable, 1.2 m chain lenght including hooks

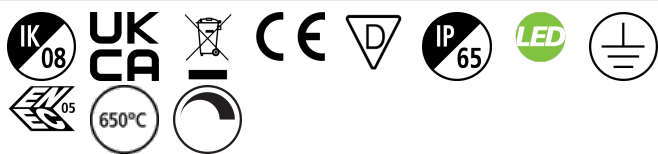

PRODUCT OVERVIEW

Product name	START Highbay IP65 1-10V 19000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4306961
E-number SE	7214415
Warranty	5 years
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	150
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	1-10V (Analogue)
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288393483

Distance [m]		Cone diameter [m]		Illuminance [lx]		Distance [m]		Cone diameter [m]		Illuminance [lx]	
C90 - C180 (Half beam angle: 90.0°)		C90 - C180 (Half beam angle: 90.0°)		C90 - C180 (Half beam angle: 90.0°)		C90 - C180 (Half beam angle: 90.0°)		C90 - C180 (Half beam angle: 90.0°)		C90 - C180 (Half beam angle: 90.0°)	
C50 - C270 (Half beam angle: 87.4°)		C50 - C270 (Half beam angle: 87.4°)		C50 - C270 (Half beam angle: 87.4°)		C50 - C270 (Half beam angle: 87.4°)		C50 - C270 (Half beam angle: 87.4°)		C50 - C270 (Half beam angle: 87.4°)	
0.5	0.99 0.99	0.99 0.99	41925 1766	0.99 0.99	41925 1766	0.5	0.96 0.96	0.96 0.96	5970 1762	0.96 0.96	5970 1762
1.0	1.97 1.90	1.97 1.90	10271 1392	1.97 1.90	10271 1392	1.0	1.91 1.82	1.91 1.82	993 1311	1.91 1.82	993 1311
1.5	2.96 2.85	2.96 2.85	6868 887	2.96 2.85	6868 887	1.5	2.87 2.80	2.87 2.80	644 800	2.87 2.80	644 800
2.0	3.94 3.81	3.94 3.81	5288 673	3.94 3.81	5288 673	2.0	3.82 3.64	3.82 3.64	543 654	3.82 3.64	543 654
2.5	4.93 4.76	4.93 4.76	4202 519	4.93 4.76	4202 519	2.5	4.78 4.79	4.78 4.79	456 510	4.78 4.79	456 510
3.0	5.92 5.71	5.92 5.71	3447 422	5.92 5.71	3447 422	3.0	5.73 5.72	5.73 5.72	372 417	5.73 5.72	372 417

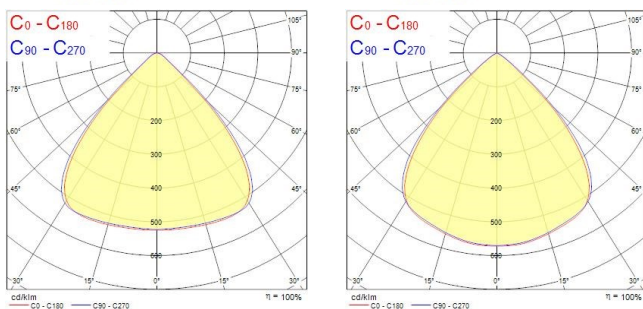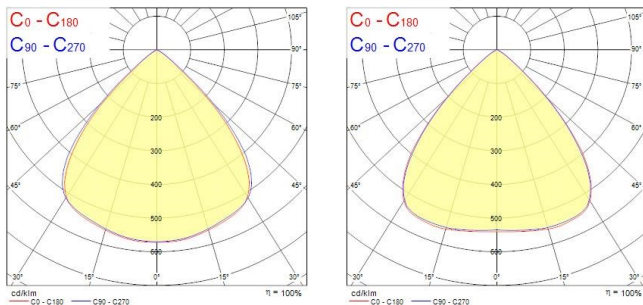

Page 2 of 3

Start Highbay

START Highbay IP65 1-10V 19000lm 840 WB

0039348

