

IVY 2 LED 600x600 43W 4000K EB UGR21
0052833



Features

- Recessed 600mm x 600mm, lay-in, UGR<21 LED luminaire, 4000K, Neutral White, Non-dimmable, 3240lm, 43W, 50,000 hours, Glow Wire Test 850°C

Product Overview


Product name	IVY 2 LED 600x600 43W 4000K EB UGR21
Technology	LED
Housing	Other
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
E-number FI	4273973
Fixture luminous flux (lm)	3240
Luminaire efficacy (lm/W)	75.34
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 21
Total power consumption (W)	43
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02

IVY 2 LED 600x600 43W 4000K EB UGR21
0052833


Product EAN number
Warranty

5410288528335
5 years

Photometry

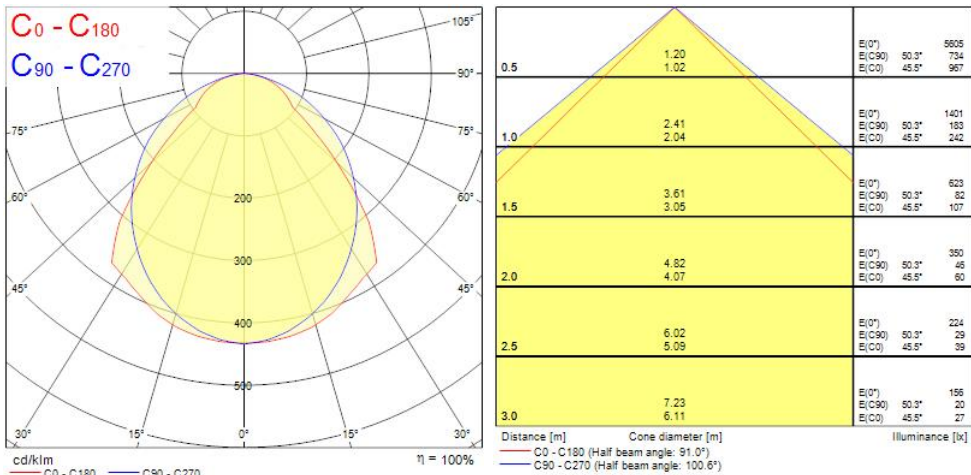

Technical drawings



Data table

IVY 2 LED 600x600 43W 4000K EB UGR21 0052833

GENERAL DATA

Product name	IVY 2 LED 600x600 43W 4000K EB UGR21
Technology	LED
Housing	Other
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
Operating temperature range (°C)	-10°C...+35°C
E-number FI	4273973
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3240
Luminaire efficacy (lm/W)	75.34
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Glare control	< 21

ELECTRICAL DATA

Total power consumption (W)	43
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Drive current (mA)	900
Inrush Current (A)	22.3
Glow Wire Test (°C)	850

PHYSICAL DATA

Housing colour	White
----------------	-------



IVY 2 LED 600x600 43W 4000K EB UGR21
0052833

IP rating	IP20
IK rating	IK02
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Weight (kg)	3.296
Recessed Depth (mm)	52

PACKAGING

Single packaging type	Carton
Product EAN number	5410288528335
Packaging single width (cm)	60.2
Packaging single depth (cm)	5.6
DUN14 (outer)	05410288528335
Packaging outer length / height (cm)	60.4

SAFETY DATA

Optimal operating condition (°C)	-10-35
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No