

19474000	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-A 32 SG	

Description

- The large, robust housing for two inserts of size 16.



General Characteristics

Series	H-A 32
Version	Surface-mount base
Locking	Double lever
Cable entry	Side, see table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials / Surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Sealing	NBR

Standard

Safety Standard	IEC 61984
-----------------	-----------

Approvals

UL-Approval, E-File-Number	In preparation
----------------------------	----------------


Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
19474000	EPIC H-A 32 SGR M25	M25	-
19474100	EPIC H-A 32 SGR M32	M32	-
19482000	EPIC H-A 32 SGRL M25	M25	M25
19482100	EPIC H-A 32 SGRL M32	M32	M32
79506800	EPIC H-A 32 SGRL M40	M40	M40

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19474000EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

19474000	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-A 32 SG	

Technical Drawings

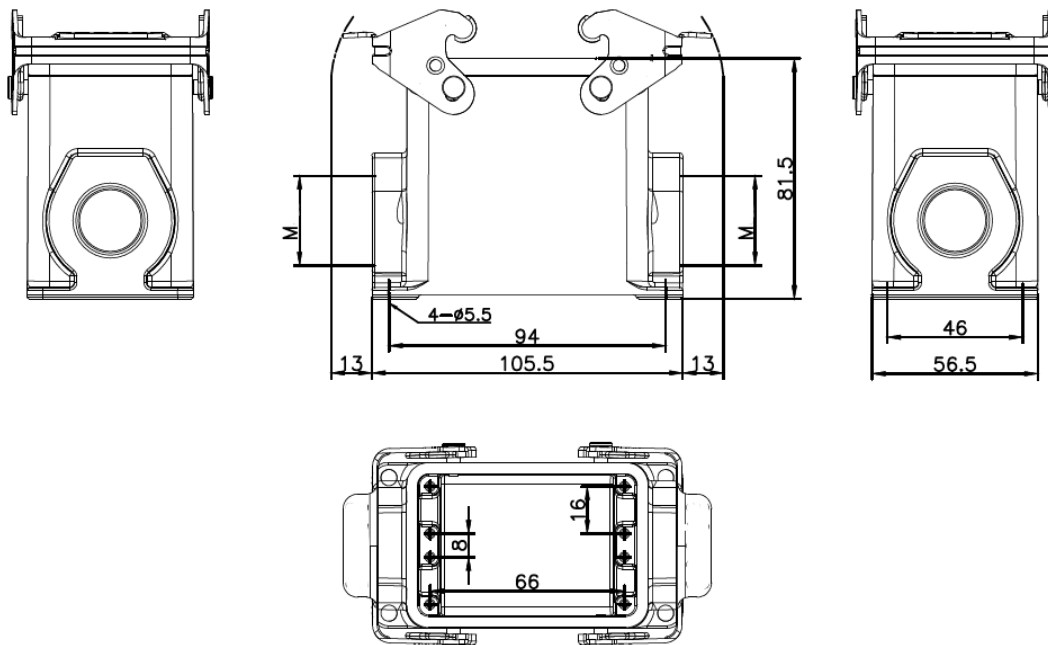

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Application range

Machine and equipment manufacturing, Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19474000EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------