



Features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing, Traffic white (RAL9016) iron housing, 2800 - 5000lm (selected by DIP switches), 20.5 - 35.5W, 135-144lm/W, Integrated switch allows to choose between warm white (3000K) and neutral white (4000K) colour temperatures, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 100000 hrs L70B50 lifespan, Non-dimmable driver with corridor function with microwave presence sensor, IK08, IP20, 1200 x 64 x 65mm (LxWxH) dimensions, 1.27kg weight. BESA compatibility. End cap incorporates 20mm conduit knock out.


Product Overview

Product name	Start Batten 1200 3000/5000lm MWC 830/840
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4279493
Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	141
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	145x110
Photobiological Risk Group	RG1
Total power consumption (W)	35.5
Electrical protection	Class I

Start Batten 1200 3000/5000lm MWC 830/840 0048981

Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK08
Product EAN number	5410288489810
Warranty	5 years
Dimming method	N/A

Photometry

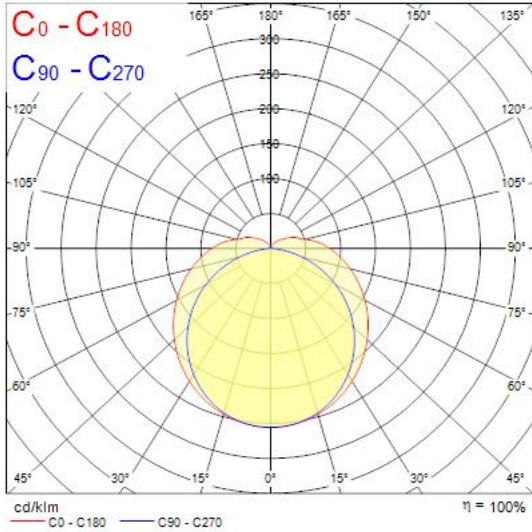

Technical drawings

