

Start Downlight 5in1 65-185 PIR

START Downlight 5in1 65-185 1800LM PIR
0053152



PRODUCT OVERVIEW

Product name	START Downlight 5in1 65-185 1800LM PIR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
E-number FI	4278433
Warranty	3 years
Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	100
Light colour	N/A
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK05
Product EAN number	5410288531526

DATA TABLE

General data

Product name	START Downlight 5in1 65-185 1800LM PIR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
Operating temperature range (°C)	-20°C...+40°C
E-number FI	4278433
Warranty	3 years

Start Downlight 5in1 65-185 PIR

START Downlight 5in1 65-185 1800LM PIR
0053152

Optical data

Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	100
Correlated colour temperature range (K)	3000 - 6500
Light colour	N/A
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	18
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.7
Electrical protection	Class II
Control gear type	LED driver constant current
Drive current (mA)	170
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	55000
Lifespan L80 B10	30000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK05
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	227
Weight (kg)	0.473

Packaging

Single packaging type	Carton
Product EAN number	5410288531526
Packaging single width (cm)	4.3
Packaging single depth (cm)	23.7
DUN14 (outer)	15410288531523
Packaging outer length / height (cm)	50.9







Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

Start Downlight 5in1 65-185 PIR

START Downlight 5in1 65-185 1800LM PIR
0053152

PHOTOMETRY

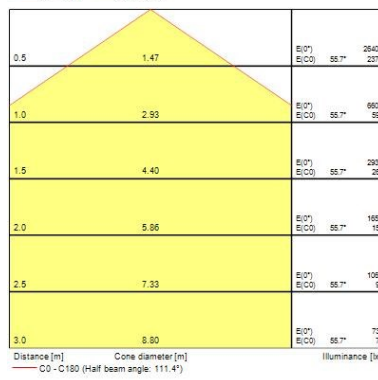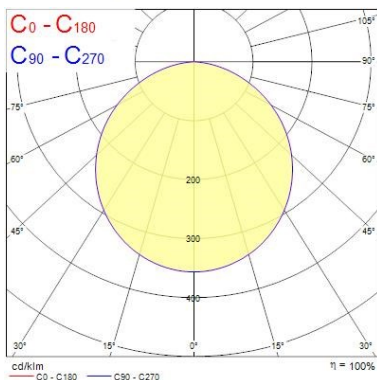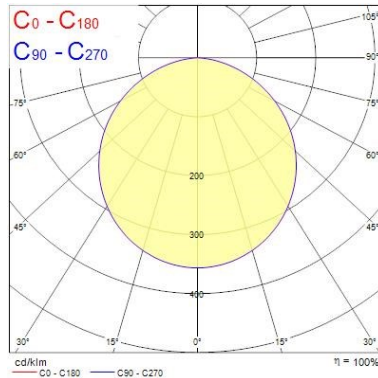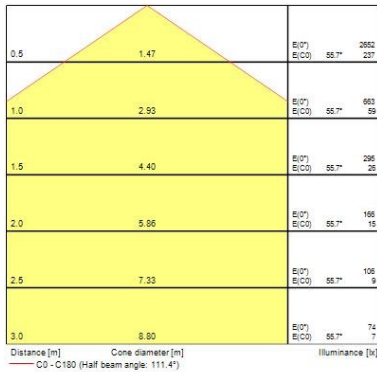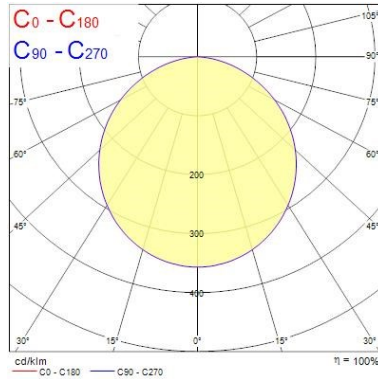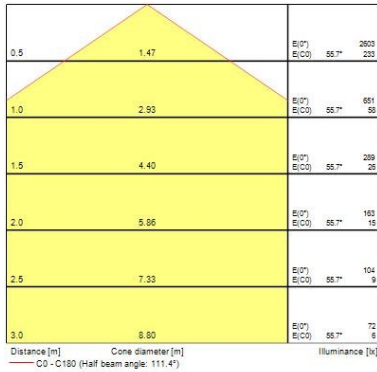

TECHNICAL DRAWINGS

