


Walraven RapidStrut® Rail Connector - U-shaped G2 (BUP1000)

(H2889)

to make Strut rail fabrications

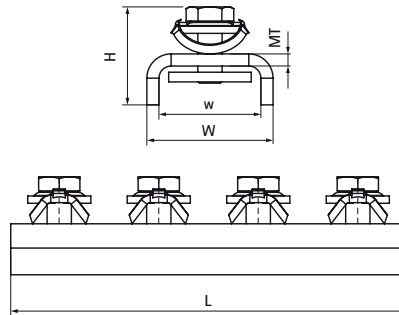

Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



| Product Number | For Rail Type | Total Width x Total Height x Total Length | Material Thickness | Width | Fixing Hole | Heart To Heart Distance | Torque Moment For Installation | Maximum Allowed Load Fax |
|------------------|-----------------------------------|---|--------------------|-------|-------------|-------------------------|--------------------------------|--------------------------|
| Reference letter | | $W \times H \times L$ | MT | w | FH | k | T _{inst.} | F _{a,x} |
| Unit description | | mm x mm x mm | mm | mm | mm | mm | Nm | N |
| 665885421 | 41x21, 41x41, 41x51, 41x62, 41x82 | 52 x 39.9 x 163 | 5.00 | 42 | 13.8 | 41 | 30 | 690 |