


### Features

- Excellent fragment retention in the event of breakageThe protective FEP coating meets the IEC60068-2-75 Pendulum Hammer test (5 Joule) and the 4m drop test, demonstrating excellent glass retention in the event of accidental lamp breakageThe 97% UV-A transmission of FEP maintains maximum insect attraction

### Product Overview

Product name	F15W T5 BL368 Toughcoat™
Technology	Special applications
Cap/Base	G5
Fixture rating	Enclosed
E-number FI	4940440
Wattage (W)	15.00
Product EAN number	5410288016504

### Technical drawings

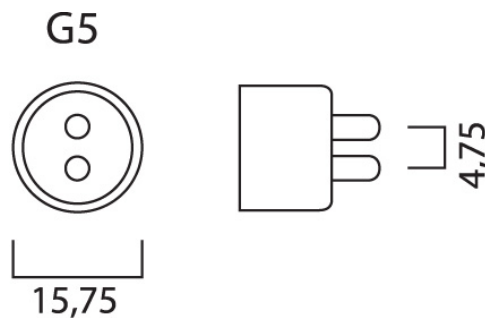

### Data table

#### GENERAL DATA

Product name	F15W T5 BL368 Toughcoat™
--------------	--------------------------

## F15W T5 BL368 Toughcoat™ 0001650

Technology	Special applications
Cap/Base	G5
Fixture rating	Enclosed
Operating temperature range (°C)	-15°C...+50°C
E-number FI	4940440

### OPTICAL DATA

Adjustable chromaticity	N
-------------------------	---

### ELECTRICAL DATA

Wattage (W)	15.00
Current (A)	0.310
Primary Supply/Product voltage - min (V)	38.0
Control gear required	No
Drive current (mA)	310

### PHYSICAL DATA

Nominal Product Length (mm)	300.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	288.3
Length base to pin Min-Max (mm) - B	293.0-295.4
Max. Lamp Length (mm) - C/L	302.5
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.023

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288016504
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288016501
Packaging outer length / height (cm)	32.0

## SAFETY DATA

Lamp mercury content (mg)	2.30
Optimal operating condition (°C)	-15-50
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Intended purpose	Flykilling - Insect attraction
Dry applications use only	No
Suitable for household illumination	No
Safety message	Not suitable for household