


# Walraven RapidStrut® Rail Connector 135° G2 (BUP1000)

(H2854)

to make Strut rail fabrications

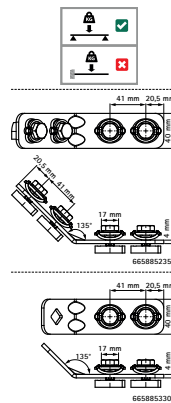

## Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- 'Direct Twist' technology for easy and secure installation
- visual guide to check the position of the slide nut
- optimized for easy installation with electrical tools
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	For Rail Type	Angle	Total Width x Total Height x Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance
Reference letter		<i>a</i>	<i>W x H x L</i>	<i>MT</i>	<i>w</i>	<i>FH</i>	<i>k</i>
Unit description		<i>°</i>	<i>mm x mm x mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
665885235	41x21, 41x41, 41x51, 41x62, 41x82	135	40 x 83.4 x 173.6	4.00	40	13.8	41
665885330	41x21, 41x41, 41x51, 41x62, 41x82	135	40 x 50.3 x 139.8	4.00	40	13.8	41