


Walraven RapidStrut® Connector 90° Rigid (BUP1000)

(H2825)

for rigid angle connections

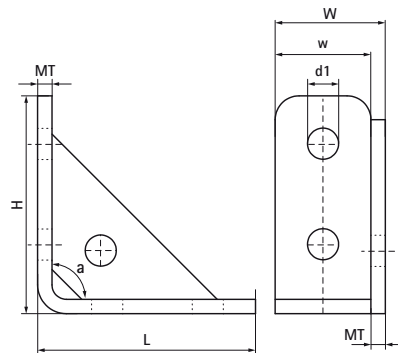

Features & benefits

- reinforced connector to make rigid fabrications with Walraven RapidStrut® rails
- easy fitting due to rounded edges
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- Faz: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5 and bolted 2 x M12 - 30Nm).
- Fax2: max. allowed load (with channel 41x41x2.5 and bolted 2 x M12 - 60Nm).



Product Number	For Rail Type	Angle	Total Width x Total Height x Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference letter		a	W x H x L	MT	w	FH	k	T _{inst.}	F _{a,z}	F _{a,x}
Unit description		°	mm x mm x mm	mm	mm	mm	mm	Nm	N	N
66588291	41x21, 41x41, 41x51, 41x62, 41x82	90	46 x 91 x 91	6.00	40	13.3	41	30	4,000	3,000