


## Walraven RapidStrut® Stainless Steel Connector 90° Rigid

(M6004)

for rigid connections of Strut rails

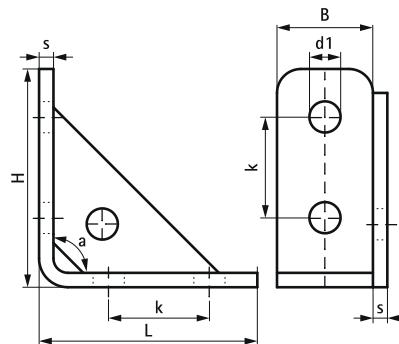

## Features &amp; benefits

- reinforced connector to make rigid fabrications with Walraven RapidStrut® rails
- easy fitting due to rounded edges
- material: stainless steel 1.4404 (A4) - EN 10088, AISI 316L
- Faz: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5).
- Faz2: max. allowed load (with rail 41x41x2.5).
- Fax: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5 and bolted 2 x M12 - 30Nm).
- Fax2: max. allowed load (with rail 41x41x2.5 and bolted 2 x M12 - 60Nm).



Product Number	For Rail Type	Angle	Total Width x Total Height x Total Length	Material Thickness	Width	Fixing Hole	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference letter		$\alpha$	$W \times H \times L$	MT	w	FH	$F_{a,z}$	$F_{a,x}$
Unit description		$^\circ$	$mm \times mm \times mm$	mm	mm	mm	N	N
66587291	41x21, 41x41	90	44 x 110 x 110	4.00	40	12.2	4,000	3,000