


## Walraven RapidStrut® T-Bracket

(H1250)

to connect rails as traverses without protruding parts

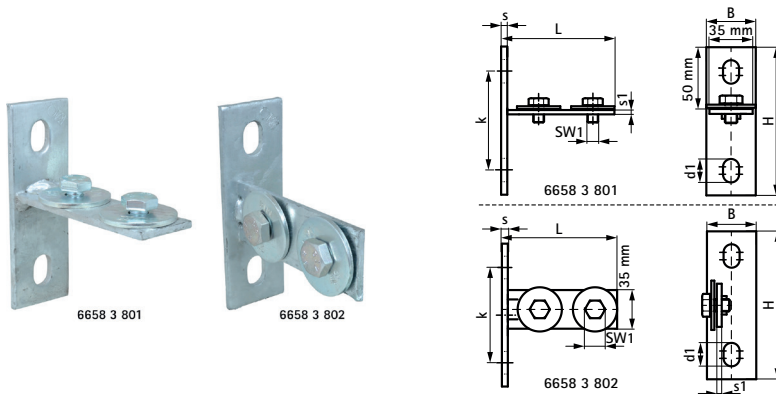

### Features & benefits

- for small spans in constructions with Walraven RapidStrut® Rail
- quick installation
- with pre-assembled screws and washers
- material: steel 1.0332
- zinc plated
- Fa,y and Fa,x fixed on rail type L (1,5mm thickness) with M12 and 25Nm.
- Fa,y2 and Fa,x2 fixed on rail type H (2,5mm thickness) with M12 and 35Nm

Product Number	For Rail Type	Total Width x Total Height x Total Length	Width	Height	Length	Heart To Heart Distance	Anchoring Slot	Fixing Hole	Material Thickness	Material Thickness 2
Reference letter		$W \times H \times L$	$w$	$h$	$l$	$k$	AS	FH	MT	MT 2
Unit description		mm x mm x mm	mm	mm	mm	mm	mm	mm	mm	mm
66583801	41x21, 41x41, 41x51, 41x62, 41x82	40 x 120 x 105	35	4	100	80	19x13	10.5	5.00	4
66583802	41x21, 41x41, 41x51, 41x62, 41x82	40 x 120 x 105	4	35	100	80	19x13	10.5	5.00	4