
Data Sheet | Item Number: 770-354

Mounting plate; 2- to 5-pole; for distribution connectors; silver-colored

https://www.wago.com/770-354



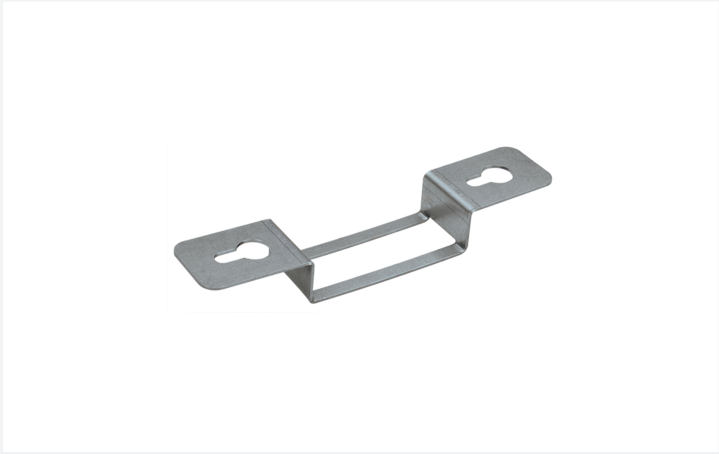

Color: silver-colored

Mounting accessories *WINSTA*® MIDI 5-pole

Put your trust in realiable accuracy for the installation for the implementation of your project: The mounting accessories from the *WINSTA*® MIDI product line. A comprehensive range of accessories rounds out the WINSTA® product line from WAGO. The *WINSTA*® MIDI product line offers maximum flexibility for the installation. With its Push-in CAGE CLAMP® spring pressure connection technology, it achieves time-saving, error-free installation and offers flexibility and customization for meeting all installation requirements.

WINSTA® MIDI solutions for your electrical installation – protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- pre-assembled versions
- quick replacement of defective units during ongoing operation

Notes

General safety information	**NOTICE: Observe installation and safety instructions!** • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! **To be sold only with installation instructions!**

Connection Data

Connection 1

Pole number	5

Mechanical data

Suitable	for T-distribution connectors; 2- to 5-pole

Material data

Note (material data)	Information on material specifications can be found here
Color	silver-colored
Fire load	0 MJ
Weight	21.2 g
Material	Coated steel

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	50 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143508162
Customs tariff number	85366990990

Product Classification

UNSPSC	39121311
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1059	E 45172

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-354

Documentation

Bid Text

770-354	19.02.2019	xml 2.53 KB
770-354	13.04.2017	doc 23.00 KB
ausschreiben.de 770-354		

CAD/CAE-Data

CAD data

2D/3D Models 770-354