





Color: ■ black

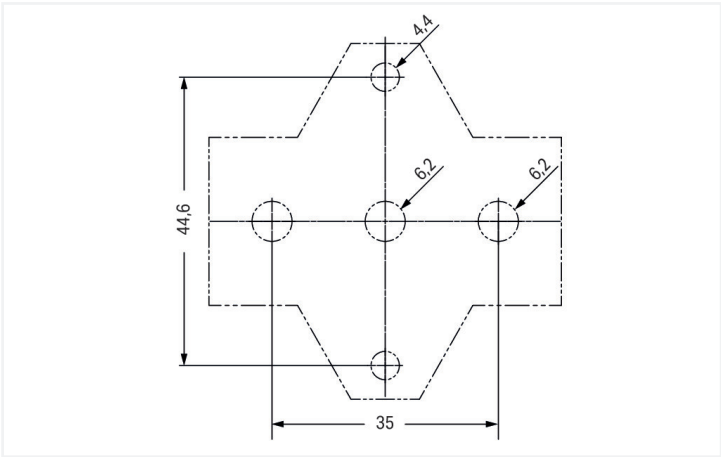

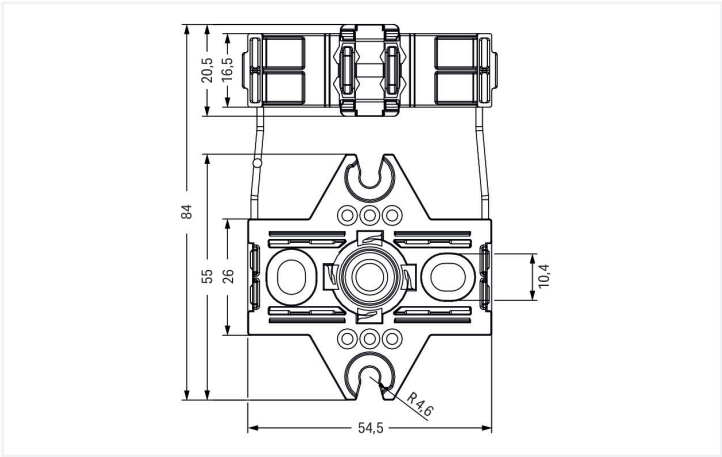

Mounting accessories WINSTA® MIDI

The mounting accessories from the WINSTA® MIDI product line guarantees you the maximum flexibility in electrical installation. A comprehensive range of accessories complements the WINSTA® product line from WAGO. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy, flexible, and secure electrical installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- pre-assembled versions
- quick replacement of defective units during ongoing operation

Notes	
General safety information	NOTICE: Observe installation and safety instructions! • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! To be sold only with installation instructions!



Mechanical data		
Suitable		for flying leads; 2- to 5-pole

Material data		
Note (material data)		Information on material specifications can be found here
Color		black
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Fire load		0.239 MJ
Weight		8 g

Environmental requirements		
Processing temperature		-5 ... +40 °C
Continuous operating temperature		-35 ... +85 °C
Note on continuous operating temperature		Insulating parts for temperatures ≤ 105 °C

Commercial data		
PU (SPU)		25 pcs
Packaging type		Box
Country of origin		DE
GTIN		4066966112085
Customs tariff number		85366990990

Product Classification		
UNSPSC		39121421
ETIM 9.0		EC002863
ETIM 10.0		EC002863
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-310

↓



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-310	ZUKEN Portal 770-310

1 Compatible Products
1.1 Optional Accessories
1.1.1 Installation
1.1.1.1 Mounting accessories



Item No.: 770-601
Fixing pin; 6 mm Ø, for 2.5 ... 4.0 mm mounting plates; Plastic; black


Installation Notes
Installation




First, secure the mounting adapter with M4 countersunk screws.



Next, place the upper part of the mounting adapter onto the base plate.



Now you can connect the plug and socket. They snap into place with the locking levers in the mounting adapter.



To disconnect the plug or socket, insert the operating tool (210-720) at an angle of approximately 15° to the connector (5 mm under the tab), then pull out the connector.