

Data Sheet | Item Number: 899-680

Mounting plate; for distribution boxes; gray

https://www.wago.com/899-680



Color: gray

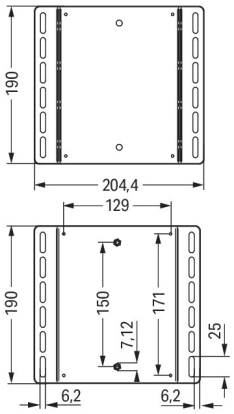

Dimensions in mm

Mounting accessories *WINSTA®*

Choose realiable sustainability for the electrical installation for the implementation of your project: The mounting accessories from the *WINSTA®* product line. A comprehensive range of accessories complements the WINSTA® product line from WAGO.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA®*

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- saves time, since no wiring is required at the construction site
- quick replacement of defective units during ongoing operation

Notes

General safety information	**NOTICE: Observe installation and safety instructions!** • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! **To be sold only with installation instructions!**

Physical data

Width	190 mm / 7.48 inches
Height	7 mm / 0.276 inches
Depth	200 mm / 7.874 inches

Mechanical data

Suitable	for distribution boxes

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0 MJ
Weight	290 g
Material	Coated steel

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966307825
Customs tariff number	85381000000

Product Classification

UNSPSC	39121321
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 899-680