


## Walraven RapidRail® Connector 135° (S/S)

(G3512)

to make Walraven RapidRail® fabrications

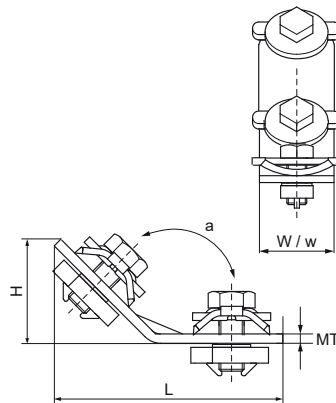

### Features & benefits

- connector with pre-assembled Walraven RapidRail® Slide nut(s)
- to make rail fabrications
- suitable for rails 27x18, 30x15, 30x20, 30x30, 30x45, 38x40
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated
- For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.



| Product Number   | For Rail Type                            | Angle    | Total Height | Total Width | Total Length | Material Thickness | Width    | Fixing Hole | Fixing Slot | Heart To Heart Distance | Torque Moment For Installation | Maximum Allowed Load Faz | Maximum Allowed Load Fax |
|------------------|------------------------------------------|----------|--------------|-------------|--------------|--------------------|----------|-------------|-------------|-------------------------|--------------------------------|--------------------------|--------------------------|
| Reference Letter |                                          | <i>a</i> | <i>H</i>     | <i>W</i>    | <i>L</i>     | <i>MT</i>          | <i>w</i> | <i>FH</i>   | <i>FS</i>   | <i>k</i>                | <i>T inst.</i>                 | <i>Fa,z</i>              | <i>Fa,x</i>              |
| Unit description |                                          | °        | mm           | mm          | mm           | mm                 | mm       | mm          | mm          | mm                      | Nm                             | N                        | N                        |
| 6584053          | 27x18, 30x15, 30x20, 30x30, 30x45, 38x40 | 135      | 44.2         | 30          | 71.1         | 3.00               | 30       | 8.2         | 12x4        | 0                       | 15                             | 1,336                    | 448                      |