



### Features

- Exterior LED spotlight suitable for wall or ground (spike) mounting, Complete with a 1M cable and an IP rated connector, Black aluminium - RAL9005, 360lm, 5W, 72lm/W, 4000K, Beam angle 55°, Driver Current: 200mA, CRI:80+, 220-240V, IP67, IK08, 30.000 hrs (L70:B50), (HxWxD) 255x70x110mm, Class 1, energy class: A++, A+, A

### Product Overview


Product name	START eco Spikelight IP67 360lm 840 WB BLK
Technology	LED
Housing	Aluminium
Environment	External
E-number FI	4579452
Fixture luminous flux (lm)	360
Luminaire efficacy (lm/W)	72
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Total power consumption (W)	5.0
Electrical protection	Class I
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP67
IK rating	IK08
Product EAN number	5410288537580
Warranty	3 years

## START eco Spikelight IP67 360lm 840 WB BLK 0053758

Colour Code

840

### Photometry

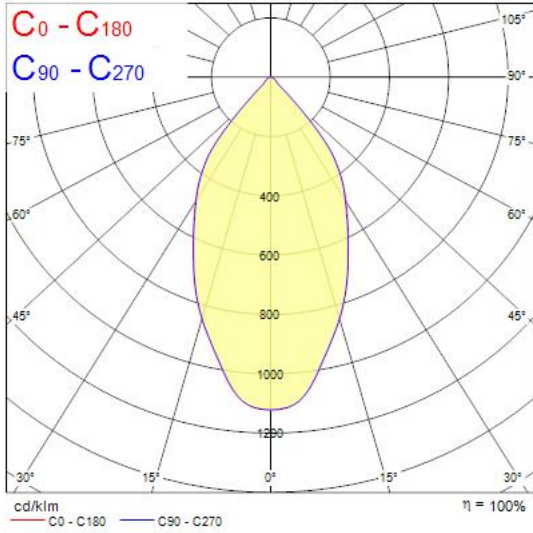

### Technical drawings

