


## Walraven RapidRail® Connector 90° (S/S)

(G3507)

to make Walraven RapidRail® fabrications

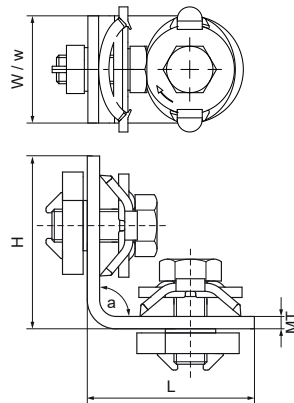

### Features & benefits

- connector with pre-assembled Walraven RapidRail® Slide nut(s)
- to make rail fabrications
- suitable for rails 27x18, 30x15, 30x20, 30x30, 30x45, 38x40
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated
- For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.



| Product Number   | NRF Number | For Rail Type                            | Angle    | Total Height | Total Width | Total Length | Material Thickness | Fixing Hole | Fixing Slot | Heart To Heart Distance | Torque Moment For Installation | Maximum Allowed Load Faz | Maximum Allowed Load Fax |
|------------------|------------|------------------------------------------|----------|--------------|-------------|--------------|--------------------|-------------|-------------|-------------------------|--------------------------------|--------------------------|--------------------------|
| Reference Letter |            |                                          | $\alpha$ | H            | W           | L            | MT                 | FH          | FS          | k                       | T <sub>inst.</sub>             | F <sub>a,z</sub>         | F <sub>a,x</sub>         |
| Unit description |            |                                          | °        | mm           | mm          | mm           | mm                 | mm          | mm          | mm                      | Nm                             | N                        | N                        |
| 6584003          | 3489243    | 27x18, 30x15, 30x20, 30x30, 30x45, 38x40 | 90       | 53.5         | 30          | 53.5         | 3.00               | 8.2         | 12x4        | 50                      | 15                             | 1,186                    | 345                      |