


## Start Downlight 5in1 65-185 PIR

*START Downlight 5in1 65-185 1800LM PIR*  
0053152



### Product features

- START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver and PIR sensor. PIR sensor with time settings (3 min max) and adjustable daylight lux level. 2 options for lumen output 900lm or 1800lm. Colour temperature (3000K, 4000K and 6500K) can be chosen by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 65mm to 185mm

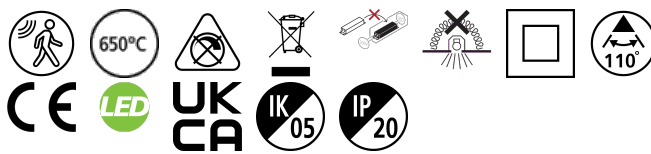

### PRODUCT OVERVIEW







|                                 |   |
|---------------------------------|---|
| Product name                    | START Downlight 5in1 65-185 1800LM PIR              |
| Technology                      | LED   |
| Cap/Base                        | N/A   |
| Housing                         | PC Polycarbonate                                    |
| Mount                           | Ceiling recessed mounting, Ceiling surface mounting |
| General application             | Retail  |
| ETIM Class                      | EC001744  |
| E-number FI                     | 4278433   |
| Warranty                        | 3 years   |
| Useful luminous flux (Fuse)     | 1800  |
| Fixture luminous flux (lm)      | 1800  |
| Luminaire efficacy (lm/W)       | 100   |
| Light colour                    | N/A   |
| CRI (Ra)                        | 80  |
| Colour Variation Initial (SDCM) | SDCM6   |
| Beam Angle (°)                  | 110   |
| Glare control                   | < 28  |
| Photobiological Risk Group      | RG0   |
| Total power consumption (W)     | 18  |
| Electrical protection           | Class II  |
| Control gear type               | LED driver constant current                         |
| Dimmable                        | No  |
| Dimming method                  | N/A   |
| Housing colour                  | RAL 9003 - Signal white                             |
| IP rating                       | IP20  |
| IK rating                       | IK05  |
| Product EAN number              | 5410288531526                                       |

### PHOTOMETRY

## Start Downlight 5in1 65-185 PIR

### START Downlight 5in1 65-185 1800LM PIR

### 0053152



## TECHNICAL DRAWINGS

