


Data Sheet | Item Number: 2007-8811/041-000

2-conductor disconnect/test terminal block; e.g., voltage transformer circuits; with touch-proof test sockets; for 4 mm Ø test plugs; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm²; Push-in CAGE CLAMP®; 6,00 mm²; gray

<https://www.wago.com/2007-8811/041-000>

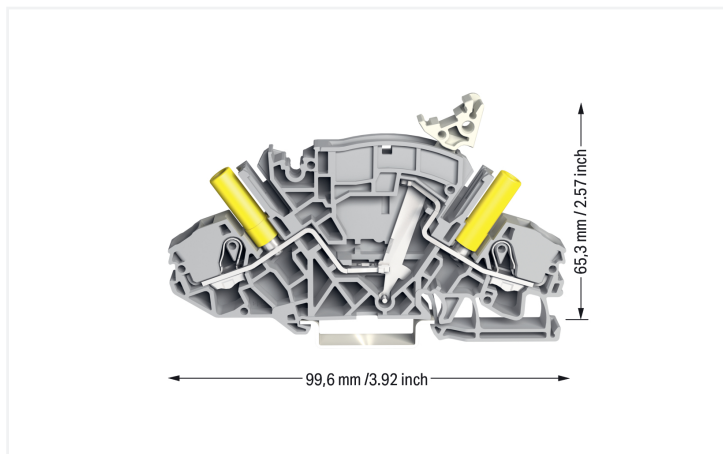

Color: ■ gray

Voltage transformer terminal block, 2007 Series, Push-in CAGE CLAMP®

Enjoy effortless electrical installations with this voltage transformer terminal block (item number 2007-8811/041-000). Strip lengths must be between 13 and 15 mm when connecting conductors to this voltage transformer terminal block. This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Our Push-in CAGE CLAMP® is a universal, maintenance-free connection solution for all conductor types, featuring a winning design: It allows direct insertion of both solid and fine-stranded conductors with ferrules without needing tools. No preparation is required; for example, crimping the conductor's ferrule is not necessary. Depending on the type of conductor, this voltage transformer terminal block is designed for conductor cross sections ranging from 0.5 mm² to 10 mm².

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	500 V	-	-
Rated impulse withstand voltage	6 kV	-	-
Rated current	30 A	-	-

Approvals per	UL 1059		
Use group	B	C	D
Rated voltage	300 V	300 V	300 V
Rated current	30 A	30 A	10 A

Approvals per	CSA 22.2 No 158		
Use group	B	C	D
Rated voltage	300 V	300 V	300 V
Rated current	30 A	30 A	10 A

Power Loss	
Power loss, per pole (potential)	0.702 W
Rated current I_N for power loss specification	30 A
Resistance value for specified, current-dependent power loss	0.00078 Ω

General information

Wiring direction	Front-entry wiring
------------------	--------------------

Connection Data

Clamping units	2
Total number of potentials	2
Number of levels	1
Number of jumper slots	2

Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	6 mm ² / 10 AWG
Solid conductor	0.5 ... 10 mm ² / 20 ... 8 AWG
Solid conductor; push-in termination	1 ... 10 mm ² / 14 ... 8 AWG
Fine-stranded conductor	0.5 ... 10 mm ² / 20 ... 8 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 6 mm ² / 20 ... 10 AWG
Fine-stranded conductor; with uninsulated ferrule	1.5 ... 6 mm ² / 16 ... 10 AWG
Fine-stranded conductor; with ferrule; push-in termination	2.5 ... 6 mm ² / 16 ... 10 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inches
Wiring direction	Front-entry wiring

Physical data

Width	8 mm / 0.315 inches
Height	99.6 mm / 3.921 inches
Depth from upper-edge of DIN-rail	65.3 mm / 2.571 inches

Mechanical data

Mounting type	DIN-35 rail
Marking level	Center/side marking

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.426 MJ
Weight	28 g
Test socket color	yellow

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

Product Group	22 (TOPJOB S)
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143074858
Customs tariff number	85365080000

Product Classification

UNSPSC	39121402
ETIM 9.0	EC000902
ETIM 10.0	EC000902
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	849875f3-2ce7-4947-ad5a-c6ebdb87da4f
SCIP notification number (Belgium)	25a4dc5d-a514-4a54-9082-01fe786f363d
SCIP notification number (Bulgaria)	16a6b43f-4503-4f20-9bc9-055f5ecb5bfb
SCIP notification number (Czech Republic)	ea412e8f-b6fd-4d09-89eb-069d438eeac1
SCIP notification number (Denmark)	88f4f41e-081b-4231-a65e-8239b11c5c2a
SCIP notification number (Finland)	75e4cc45-c5d4-4591-afa1-ffdae8579e25
SCIP notification number (France)	f5a576a9-5c13-4a82-b460-b6bd6c8b5cd0
SCIP notification number (Germany)	55183ae8-7b6d-4a09-b10f-254653b55f12
SCIP notification number (Hungary)	82fd0e93-565e-4051-901e-5b951c09646a
SCIP notification number (Italy)	cc72cf82-1f5a-45cd-9056-4880bf8c9e67
SCIP notification number (Netherlands)	da35d3b7-47c7-4af1-bd11-08c3329f0982
SCIP notification number (Poland)	3a2c14b6-97d1-40e8-9f8e-670f066fdb80
SCIP notification number (Romania)	1942f9ae-a58d-4c0a-bd5e-27189e6d08c8
SCIP notification number (Sweden)	3be5ef38-dd80-411c-9a10-a4eef3731e2c

Approvals / Certificates

General approvals **Declarations of conformity and manufacturer's declarations**



Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2 No. 158	70009679
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-131652
UL UL International Germany GmbH	UL 1059	E45172

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2
PRS Polski Rejestr Statków	-	TE/1094/880590/23

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
2007-8811/041-000



CAD/CAE-Data

CAD data

2D/3D Models
2007-8811/041-000



1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



[Item No.: 2007-8893](#)

End plate; 1.5 mm thick; with lock-out seal option; gray

[Item No.: 2007-8894](#)

End plate; 1.5 mm thick; with lock-out seal option; orange

[Item No.: 2007-8891](#)

End plate; 1.5 mm thick; without lock-out seal option; gray

[Item No.: 2007-8892](#)

End plate; 1.5 mm thick; without lock-out seal option; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



[Item No.: 210-196](#)

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item No.: 210-198](#)

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



[Item No.: 210-197](#)

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



[Item No.: 210-114](#)

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item No.: 210-118](#)

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



[Item No.: 210-115](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



[Item No.: 210-112](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



[Item No.: 210-113](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

1.2.2 Installation

1.2.2.1 Cover



Item No.: 709-156

Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

1.2.2.2 Cover carrier



Item No.: 709-169

Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.2.3 Jumper

1.2.3.1 Jumper



Item No.: 282-440

Jumper; 10-way; insulated; orange



Item No.: 282-432

Jumper; 2-way; insulated; orange



Item No.: 282-432/100-000

Jumper; 2-way; insulated; orange



Item No.: 282-433

Jumper; 3-way; insulated; orange



Item No.: 282-433/100-000

Jumper; 3-way; insulated; orange



Item No.: 282-434

Jumper; 4-way; insulated; orange



Item No.: 282-434/100-000

Jumper; 4-way; insulated; orange



Item No.: 282-435

Jumper; 5-way; insulated; orange



Item No.: 282-436

Jumper; 6-way; insulated; orange



Item No.: 282-437

Jumper; 7-way; insulated; orange



Item No.: 282-438

Jumper; 8-way; insulated; orange



Item No.: 282-439

Jumper; 9-way; insulated; orange



Item No.: 282-435/011-000

Jumper; insulated; orange



Item No.: 282-435/300-000

Jumper; insulated; orange



Item No.: 282-435/301-000

Jumper; insulated; orange



Item No.: 282-436/301-000

Jumper; insulated; orange



Item No.: 282-436/304-000

Jumper; insulated; orange



Item No.: 282-437/011-000

Jumper; insulated; orange



Item No.: 282-437/012-000

Jumper; insulated; orange



Item No.: 282-438/300-000

Jumper; insulated; orange



Item No.: 282-438/301-000

Jumper; insulated; orange



Item No.: 282-439/011-000

Jumper; insulated; orange

1.2.4 Locking system

1.2.4.1 Locking system



Item No.: 210-254

Interlocking link; mechanically locks multiple links; 1 m long; transparent



Item No.: 282-881

Locking cover; mechanically locks multiple links; 1-pole; transparent



Item No.: 282-882

Locking cover; mechanically locks multiple links; 2-pole; transparent



Item No.: 282-883

Locking cover; mechanically locks multiple links; 3-pole; transparent



Item No.: 282-884

Locking cover; mechanically locks multiple links; 4-pole; transparent



Item No.: 282-885

Locking cover; mechanically locks multiple links; 5-pole; transparent



Item No.: 282-886

Locking cover; mechanically locks multiple links; 6-pole; transparent



Item No.: 282-887

Locking cover; mechanically locks multiple links; 7-pole; transparent



Item No.: 282-888

Locking cover; mechanically locks multiple links; 8-pole; transparent

1.2.5 Lock-out

1.2.5.1 Locking system



Item No.: 2007-8899

Lock-out; for disconnect link; yellow

1.2.6 Marking

1.2.6.1 Marker



Item No.: 793-501/000-006

WMB marking card; as card; not stretchable; plain; snap-on type; blue



Item No.: 793-501/000-007

WMB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 793-501/000-023

WMB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 793-501/000-017

WMB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 793-501/000-012

WMB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 793-501/000-005

WMB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 793-501/000-024

WMB marking card; as card; not stretchable; plain; snap-on type; violet



Item No.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-501/000-002

WMB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-007

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-115/000-023

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



Item No.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.2.6.2 Marker carrier



Item No.: 2009-198

Adaptor; gray

1.2.6.3 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.2.7 Protective warning marker

1.2.7.1 Cover



Item No.: 2006-115

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.8 Screwless end stop

1.2.8.1 Mounting accessories



Item No.: 249-117

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.2.9 Tool

1.2.9.1 Operating tool




Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured



Installation Notes

Commoning



Additional commoning option on the transformer side


Security



Lock-out prevents accidental operation of disconnect link.

Lock-out snaps into one of two notched positions.


Locking system




Using locking covers or profiles for adjacent terminal blocks allows disconnect links to be operated simultaneously.

A lock-out seal can be used on the disconnect link in operating position I when combined with an end and separator plate (Item No. 2007-8893 or Item No. 2007-8894).

Interlocking link mechanically locks multiple links for multi-pole switching applications.



Disconnect/Test Terminal Block (2007-8811)




Example for voltage transformer testing Measuring set for single-phase voltage transformer testing

Terminal blocks required:
 1 x disconnect/test terminal block (2007-8811)
 1 x through terminal block (2007-8801)
 1 x end plate, orange (2007-8892)
 In addition: locking cover, lock-out

Disconnecting the voltage transformer from the circuit: Move disconnect link from operating position to measurement position.
 Voltage measurement: Connecting a measurement device via test socket on the meter side can only be performed after disconnection is complete (measuring point).

Marking



Marking via WMB Multi markers or marking strips.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com