


# Insaver UGR19 IP44 175 1700LM 840

Item No: 0030503


**SYLVANIA**

**PRO**

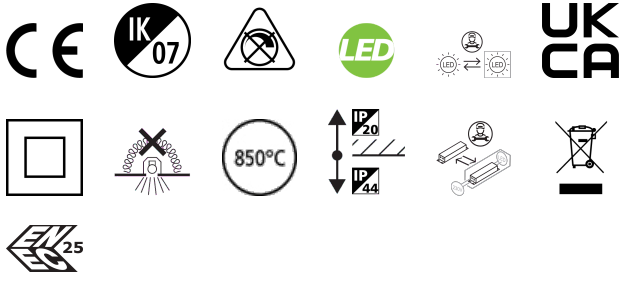

## Technical Assets

### Dimensions (mm)

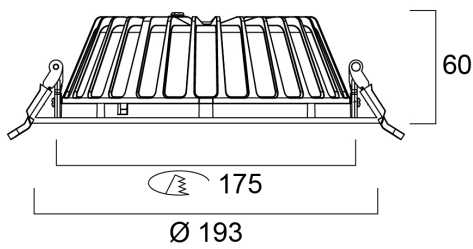


### Photometrics

0.5	0.79	EPD	300°	338
		EDC	300°	344
1.0	1.45	EPD	300°	100
		EDC	300°	96
1.5	2.18	EPD	300°	80
		EDC	300°	80
2.0	2.91	EPD	300°	55
		EDC	300°	55
2.5	3.63	EPD	300°	33
		EDC	300°	33
3.0	4.36	EPD	300°	18
		EDC	300°	18

distance [m]      cone diameter [m]      beamance [°]

— C0180 (beam angle 175, 17.4°)



# Insaver UGR19 IP44 175 1700LM 840

Item No: 0030503

**SYLVANIA**

## General data

Product name	Insaver UGR19 IP44 175 1700LM 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4278514
Warranty	5 years

## Optical data

Useful luminous flux ( $\Phi_{use}$ )	1700
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	131
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	13
Primary Supply/Product voltage - min (V)	220.0
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimming method	N/A
Drive current (mA)	400
Inrush Current (A)	20
Inrush Duration ( $\mu$ s)	105
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	74
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Lifetime data

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	88000
Lifespan L80 B10	80000
Lifespan L90 B50	50000
Lifespan L90 B20	43000
Lifespan L90 B10	39000

# Insaver UGR19 IP44 175 1700LM 840

Item No: 0030503

**SYLVANIA**

## Physical data

Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	195
Built-in diameter (mm)	175
Weight (kg)	0.55

## Packaging

Product EAN number	5410288305035
Packaging single width (cm)	20.5
Packaging single depth (cm)	7.3
DUN14 (inner)	15410288305032
Packaging outer length / height (cm)	42.5

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40