


# Concord

## COLOSSAL 400mm 940 OPAL DIR WHITE

2071121

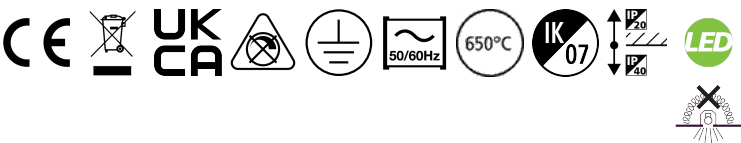

### Features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 2200lm luminous flux, 21W system power, 105lm/W luminaire efficacy. Constant current driver. Colour rendering index Ra >90, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.


### Product Overview

Product name	COLOSSAL 400mm 940 OPAL DIR WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	105
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)

**COLOSSAL 400mm 940 OPAL DIR WHITE**  
**2071121**

<b>Housing colour</b>	RAL9016
<b>IP rating</b>	IP40/20
<b>IK rating</b>	IK07
<b>Product EAN number</b>	5025768711215
<b>Warranty</b>	5 years
<b>Dimming method</b>	N/A
<b>Colour Code</b>	940

## Photometry

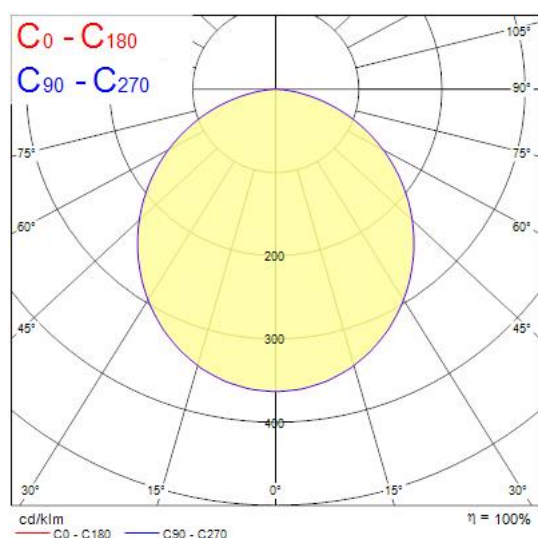

## Technical drawings

