
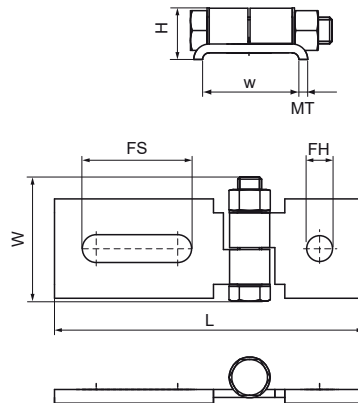


# Walraven RapidStrut® Connector, Hinged (BUP1000)

(H2840)

for flexible angle connections



## Features & benefits

- to make fabrication with Walraven RapidStrut® Rail
- fully adjustable
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number   | For Rail Type                     | Total Height | Total Width | Total Length | Material Thickness | Width | Fixing Hole | Fixing Slot | Maximum Allowed Load Faz |
|------------------|-----------------------------------|--------------|-------------|--------------|--------------------|-------|-------------|-------------|--------------------------|
| Reference Letter |                                   | H            | W           | L            | MT                 | w     | FH          | FS          | Fa,z                     |
| Unit description |                                   | mm           | mm          | mm           | mm                 | mm    | mm          | mm          | N                        |
| 66581821         | 41x21, 41x41, 41x51, 41x62, 41x82 | 24.1         | 62.5        | 115.4        | 4.00               | 42    | 13          |             | 1,000                    |
| 66581822         | 41x21, 41x41, 41x51, 41x62, 41x82 | 24.1         | 62.5        | 155.9        | 4.00               | 42    | 13          | 45x14       | 1,000                    |
| 66581823         | 41x21, 41x41, 41x51, 41x62, 41x82 | 24.1         | 62.5        | 196.4        | 4.00               | 42    |             | 45x14       | 1,000                    |