

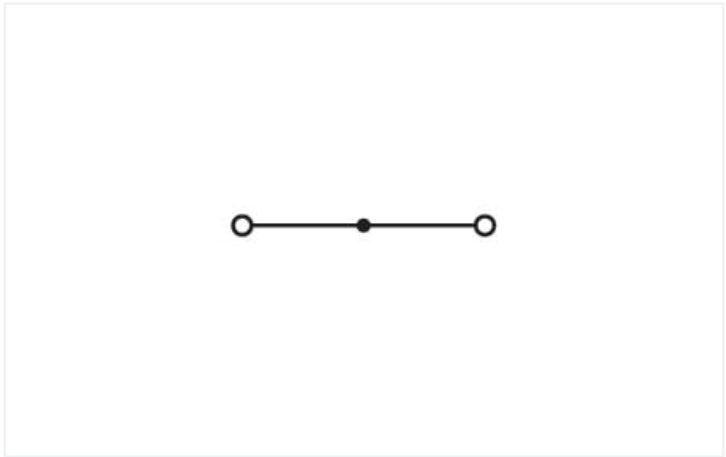


Color: ■ yellow

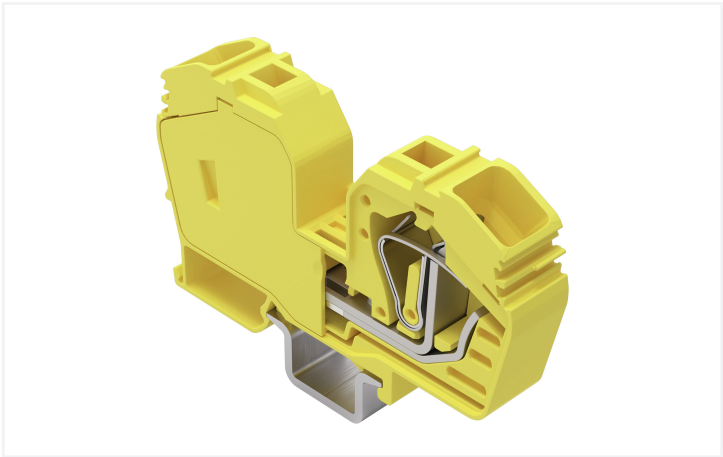

Similar to illustration

Electrical data						
Ratings per		IEC/EN 60947-7-1			Ratings per IEC/EN 2	
Overvoltage category		III	III	II	Rated voltage (III/3) 2	1500 V
Pollution degree		3	2	2	Rated surge voltage (III/3) 2	12 kV
Nominal voltage		1000 V	-	-		
Rated surge voltage		12 kV	-	-		
Rated current		125 A	-	-		
Power Loss						
Power loss, per pole (potential)		4.0625 W				
Rated current I <sub>N</sub> for specified power loss		125 A				
Resistance value for specified, current-dependent power loss		0.00026 Ω				

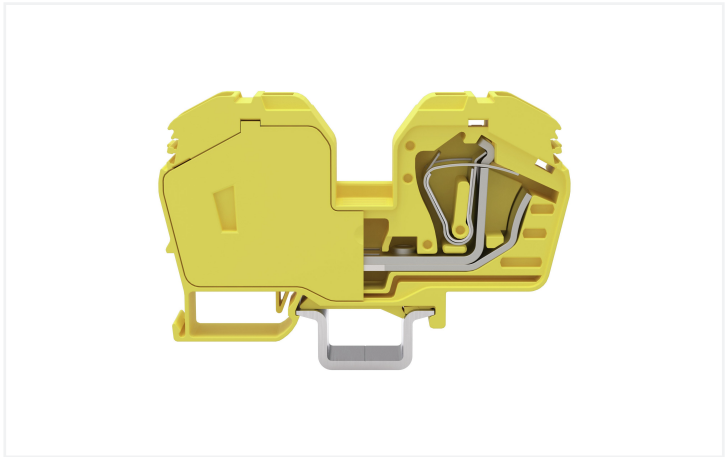

Connection data																		
Connection points	2	<div>Connection 1</div> <table><tr><td>Connection technology</td><td>CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool</td></tr><tr><td>Connectable conductor materials</td><td>Copper</td></tr><tr><td>Nominal cross-section</td><td>35 mm²</td></tr><tr><td>Solid conductor</td><td>6 ... 35 mm² / 10 ... 2 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>6 ... 35 mm² / 10 ... 2 AWG</td></tr><tr><td>Strip length</td><td>23 mm / 0.91 inches</td></tr><tr><td>Wiring direction</td><td>Front-entry wiring</td></tr></table>	Connection technology	CAGE CLAMP®	Actuation type	Operating tool	Connectable conductor materials	Copper	Nominal cross-section	35 mm²	Solid conductor	6 ... 35 mm² / 10 ... 2 AWG	Fine-stranded conductor	6 ... 35 mm² / 10 ... 2 AWG	Strip length	23 mm / 0.91 inches	Wiring direction	Front-entry wiring
Connection technology	CAGE CLAMP®																	
Actuation type	Operating tool																	
Connectable conductor materials	Copper																	
Nominal cross-section	35 mm²																	
Solid conductor	6 ... 35 mm² / 10 ... 2 AWG																	
Fine-stranded conductor	6 ... 35 mm² / 10 ... 2 AWG																	
Strip length	23 mm / 0.91 inches																	
Wiring direction	Front-entry wiring																	
Total number of potentials	1																	
Number of levels	1																	

Physical data		
Width		16 mm / 0.63 inches
Height		100 mm / 3.937 inches
Depth from upper-edge of DIN-rail		53 mm / 2.087 inches

Mechanical data		
Mounting type		DIN-35 rail
Mounting (note)		only suitable for DIN 35 x 15 rail
Marking level		Center/side marking

Material data		
Note (material data)		<a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a>
Color		yellow
Material group		I
Insulation material		Polyamide (PA66)
Flammability class per UL94		V0
Fire load		1.1 MJ
Weight		88.3 g

Environmental requirements		
Processing temperature		-35 ... +85 °C
Continuous operating temperature		-60 ... +105 °C

Commercial data		
ETIM 8.0		EC000897
PU (SPU)		15 pcs
Country of origin		PL
GTIN		4066966231847
Customs tariff number		85369010000



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor-	-	-
CCA	EN 60947	NTR NL-7707	mity		
DEKRA Certification B.V.			WAGO GmbH & Co. KG		
KEMA/KEUR	EN 60947	71-105562	UK-Declaration of Confor-	-	-
DEKRA Certification B.V.			mity		
WAGO GmbH & Co. KG			WAGO GmbH & Co. KG		
UL	UL 1059	E45172			
Underwriters Laboratories Inc.					

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 285-636	

Documentation

Additional Information		
Technical Section	pdf 2240.62 KB	

1 Compatible Products

1.1 Required Accessories

1.1.1 Cover

1.1.1.1 Cover



Item No.: 285-401  
Finger guard; touchproof cover protects unused conductor entries; for 35 mm² high-current tbs; yellow



1.1.2 Jumper

1.1.2.1 Jumper



Item No.: 285-435

Jumper; insulated; gray

Item No.: 283-414

Step-down jumper; from 283 to 281 series; insulated; gray

Item No.: 285-430

Step-down jumper; from 285 (35mm²) to 2016/2010 series; insulated; gray

1.1.3 Power tap

1.1.3.1 Power tap



Item No.: 283-407

Power tap; with 500 mm cable; for 16 mm² (283/783 Series) and 35 mm²; gray

1.1.4 Protective warning marker

1.1.4.1 Cover



Item No.: 285-416

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



Item No.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



Item No.: 210-508

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored



Item No.: 210-197

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



Item No.: 210-506

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored



Item No.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



1.2.2 Ferrule

1.2.2.1 Ferrule



**Item No.: 216-413**  
Ferrule; Sleeve for 25 mm² / AWG 4; unin-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 1/08.92; silver-colored



**Item No.: 216-414**  
Ferrule; Sleeve for 35 mm² / AWG 2; unin-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 1/08.92; silver-colored

1.2.3 Installation

1.2.3.1 Cover



**Item No.: 709-154**  
Cover; Type 2; suitable for cover carrier,  
type 2; 1 m long; transparent

1.2.3.2 Cover carrier



**Item No.: 709-168**  
Cover carrier; Type 2; incl. fixing/retaining  
screws and knurled nut; suitable for 283 to  
285 Series rail-mounted terminal blocks;  
suitable for 279 to 281 Series double- and  
triple-deck terminal blocks; suitable for  
780 to 785, 775, 776 and 777 Series TOP-  
JOB® rail-mounted terminal blocks; suita-  
ble for 280 Series sensor and actuator ter-  
minal blocks; suitable for 282 Series dis-  
connect/test terminal blocks for transfor-  
mer circuits; gray

1.2.3.3 Mounting accessories



**Item No.: 249-116**  
Screwless end stop; 6 mm wide; for DIN-  
rail 35 x 15 and 35 x 7.5; gray

1.2.4 Marking

1.2.4.1 Marker



**Item No.: 2009-145/000-006**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; blue



**Item No.: 2009-145/000-007**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; gray



**Item No.: 2009-145/000-023**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; green



**Item No.: 2009-145/000-012**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; orange



**Item No.: 2009-145/000-005**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; red



**Item No.: 2009-145/000-024**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; violet






































**Item No.: 2009-145**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; white



**Item No.: 2009-145/000-002**  
Mini-WSB Inline; for Smart Printer; 1700  
pieces on roll; stretchable 5 - 5.2 mm;  
plain; snap-on type; yellow



1.2.4.1 Marker

 <b>Item No.: 248-501/000-006</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue	 <b>Item No.: 248-501/000-007</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray	 <b>Item No.: 248-501/000-023</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green	 <b>Item No.: 248-501/000-017</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green
 <b>Item No.: 248-501/000-012</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange	 <b>Item No.: 248-501/000-005</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red	 <b>Item No.: 248-501/000-024</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet	 <b>Item No.: 248-501</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white
 <b>Item No.: 248-501/000-002</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow	 <b>Item No.: 793-5501/000-006</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue	 <b>Item No.: 793-5501/000-007</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray	 <b>Item No.: 793-5501/000-023</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green
 <b>Item No.: 793-5501/000-017</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green	 <b>Item No.: 793-5501/000-012</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange	 <b>Item No.: 793-5501/000-005</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red	 <b>Item No.: 793-5501/000-024</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet
 <b>Item No.: 793-5501</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white	 <b>Item No.: 793-5501/000-002</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow	 <b>Item No.: 793-501/000-006</b> WMB marking card; as card; not stretchable; plain; snap-on type; blue	 <b>Item No.: 793-501/000-007</b> WMB marking card; as card; not stretchable; plain; snap-on type; gray
 <b>Item No.: 793-501/000-023</b> WMB marking card; as card; not stretchable; plain; snap-on type; green	 <b>Item No.: 793-501/000-017</b> WMB marking card; as card; not stretchable; plain; snap-on type; light green	 <b>Item No.: 793-501/000-012</b> WMB marking card; as card; not stretchable; plain; snap-on type; orange	 <b>Item No.: 793-501/000-005</b> WMB marking card; as card; not stretchable; plain; snap-on type; red
 <b>Item No.: 793-501/000-024</b> WMB marking card; as card; not stretchable; plain; snap-on type; violet	 <b>Item No.: 793-501</b> WMB marking card; as card; not stretchable; plain; snap-on type; white	 <b>Item No.: 793-501/000-002</b> WMB marking card; as card; not stretchable; plain; snap-on type; yellow	 <b>Item No.: 2009-115/000-006</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue
 <b>Item No.: 2009-115/000-007</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray	 <b>Item No.: 2009-115/000-023</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green	 <b>Item No.: 2009-115/000-017</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green	 <b>Item No.: 2009-115/000-012</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange
 <b>Item No.: 2009-115/000-024</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet	 <b>Item No.: 2009-115</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	 <b>Item No.: 2009-115/000-002</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow	

1.2.4.2 Marker carrier

 <b>Item No.: 2009-198</b> Adaptor; gray
---

1.2.5 Tool

1.2.5.1 Operating tool



**Item No.: 210-721**  
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured


Installation Notes

Conductor termination




Terminating a 35 mm² (2 AWG) conductor.

Commoning



Commoning with step-down jumper (283-414) from 285 Series (35 mm²/2 AWG) to 281 Series terminal blocks (4 mm²/12 AWG).



The following 285 Series Through Terminal Blocks can be commoned with 283 Series Through Terminal Blocks: 285-635 or 285-634 with 283-601 or 283-604 (terminal blocks with side marking, visit [www.wagocatalog.com](http://www.wagocatalog.com))  
Adjacent jumper required: 285-435

Please note that the nominal current of the adjacent jumper must not exceed 63 A.

Cover




Protective warning markers inserted into the operating slots



Finger guard seals an unused conductor entry.

Marking



Labeling via WMB Multi Marking System.