


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 77.49 lm/W			
MODEL	169-273	Imax(cd)	1519	S/MH(C0/180)	0.60
NOMINAL POWER(W)	7	LOR(%)	100.0	S/MH(C90/270)	0.64
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	664.14	η UP, DN(C0-180)	0.0, 47.7
NOMINAL FLUX(lm)	664.139	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 52.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	230	η down(%)	100.0	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

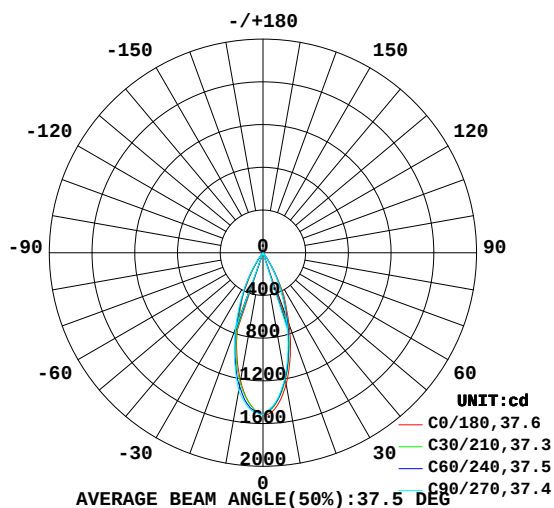

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

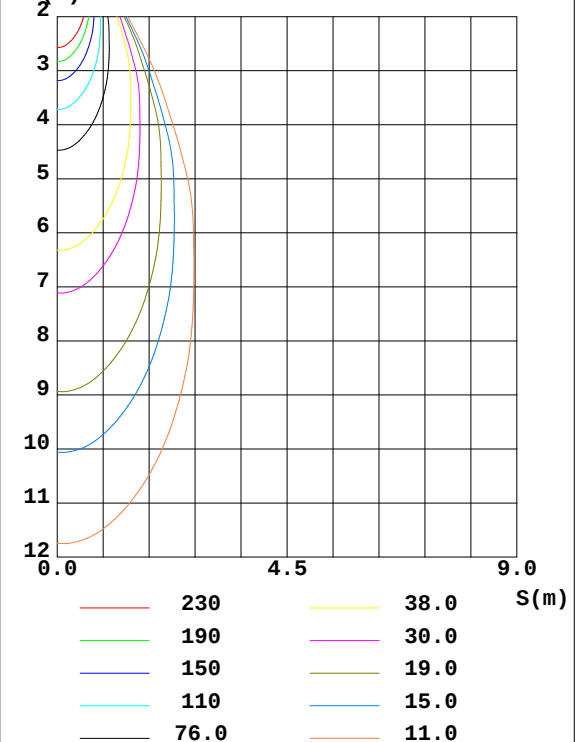

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1249	1201	1189	1181	1216	1248	1311	1274	0- 10	129.7	129.7	19.5, 19.5
20	710.4	656.6	630.6	641.1	671.5	709.7	745.1	741.0	10- 20	265.6	395.3	59.5, 59.5
30	245.8	225.5	202.0	205.8	226.3	259.0	271.8	267.7	20- 30	203.9	599.2	90.2, 90.2
40	16.67	16.38	13.65	15.15	16.75	19.78	19.29	18.59	30- 40	57.42	656.6	98.9, 98.9
50	2.031	2.287	2.319	2.001	1.954	2.118	1.941	1.858	40- 50	4.729	661.4	99.6, 99.6
60	0.7121	1.049	1.463	1.204	0.8058	0.8426	0.7684	0.7330	50- 60	1.258	662.6	99.8, 99.8
70	0.1748	0.6892	1.146	1.046	0.3177	0.2827	0.2484	0.2283	60- 70	0.6848	663.3	99.9, 99.9
80	0.1104	0.7122	1.003	1.015	0.2346	0.1969	0.1748	0.1509	70- 80	0.5059	663.8	100, 100
90	0.0414	0	0	0	0.0460	0	0	0	80- 90	0.3127	664.1	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:IMIGY
 Test Date:2020-12-16

V(B) Range:-85 - 85DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.240m [K=1.0000]
 Remarks: 169-273

LUMINANCE LIMITATION CURVES

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

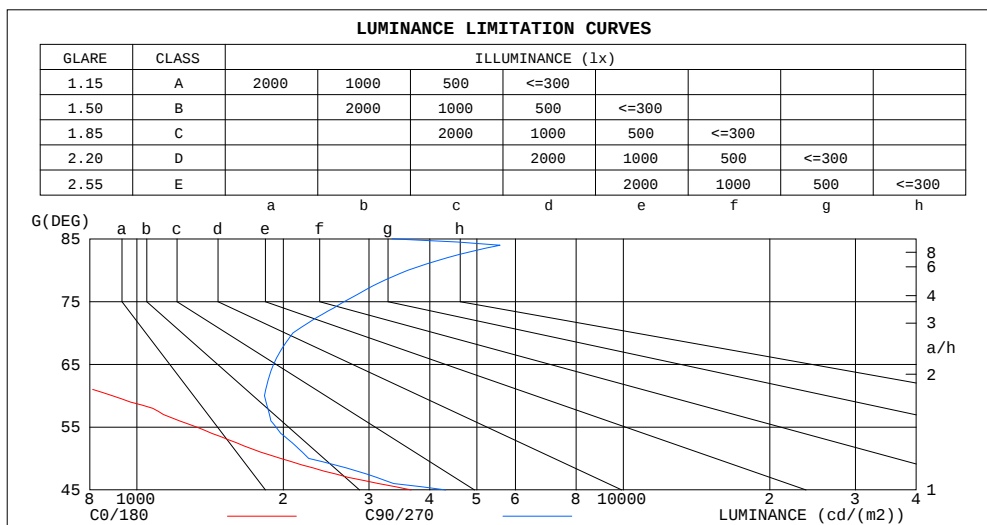

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	297	3346
80	397	3610
75	278	2670
70	319	2093
65	577	1910
60	890	1829
55	1327	1932
50	1975	2255
45	3662	4314


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.90	.94	.91	.89	.92	.90	.88	.86
4.0	.95	.90	.87	.94	.90	.86	.92	.88	.85	.90	.87	.84	.88	.86	.84	.82
5.0	.90	.86	.82	.90	.85	.82	.88	.84	.81	.86	.83	.80	.85	.82	.80	.78
6.0	.86	.81	.78	.86	.81	.78	.84	.80	.77	.83	.79	.77	.82	.79	.76	.75
7.0	.82	.78	.74	.82	.77	.74	.81	.77	.73	.80	.76	.73	.79	.75	.73	.72
8.0	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.73	.70	.76	.72	.70	.68
9.0	.76	.71	.67	.75	.71	.67	.74	.70	.67	.74	.70	.67	.73	.69	.67	.66
10.0	.73	.68	.65	.72	.68	.65	.72	.67	.64	.71	.67	.64	.70	.67	.64	.63

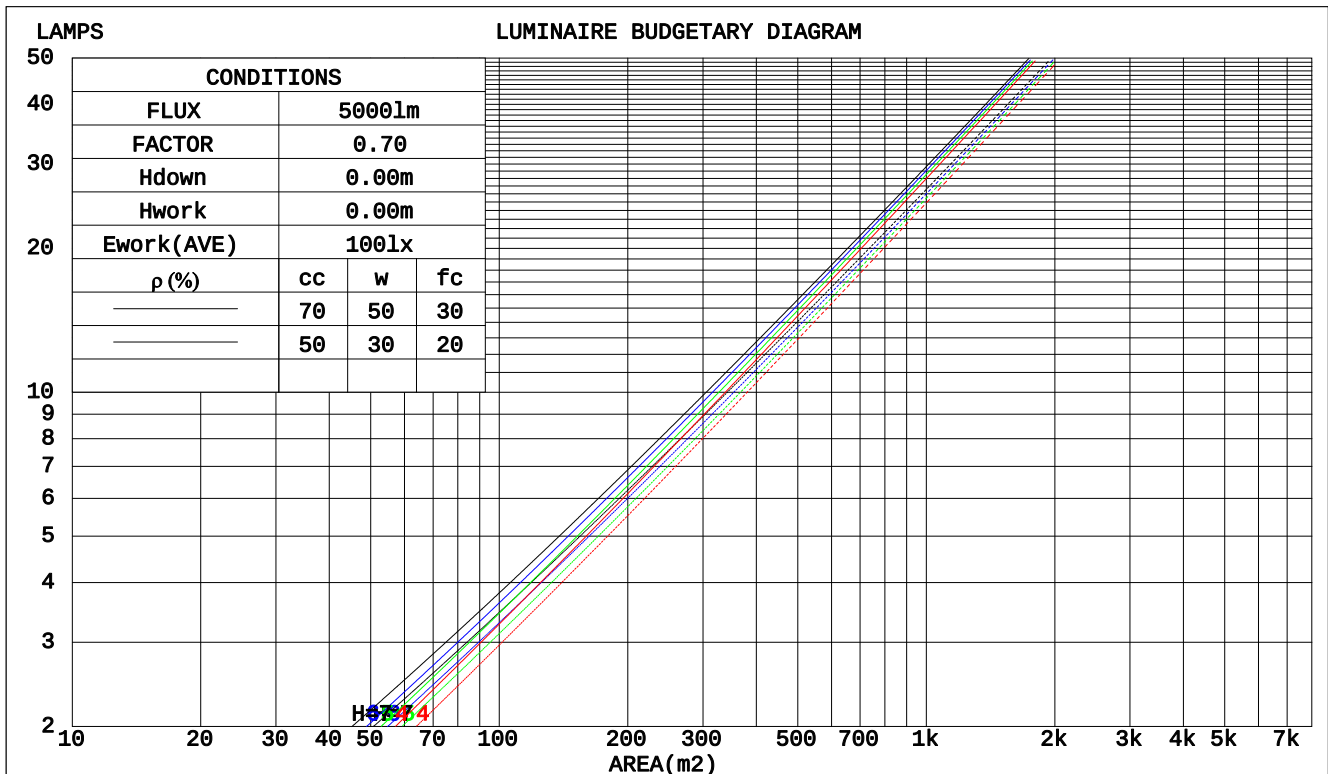

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

WEC AND CCEC

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm									
NAME: 169-273					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: EVERFINE					SUR.:45			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.155	.088	.028	.148	.084	.027	.136	.078	.025	.124	.072	.023	.113	.066	.021	
2.0	.145	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020	
3.0	.137	.073	.022	.132	.071	.021	.124	.067	.020	.116	.063	.019	.108	.060	.019	
4.0	.130	.067	.020	.126	.066	.019	.118	.063	.019	.111	.060	.018	.105	.057	.017	
5.0	.123	.063	.018	.120	.062	.018	.113	.059	.017	.107	.057	.017	.102	.054	.016	
6.0	.117	.059	.017	.115	.058	.017	.109	.056	.016	.104	.054	.016	.099	.052	.015	
7.0	.112	.056	.016	.110	.055	.016	.105	.053	.015	.100	.051	.015	.096	.050	.015	
8.0	.108	.053	.015	.105	.052	.015	.101	.050	.014	.097	.049	.014	.093	.048	.014	
9.0	.103	.050	.014	.101	.049	.014	.097	.048	.014	.094	.047	.013	.090	.046	.013	
10.0	.099	.048	.013	.097	.047	.013	.094	.046	.013	.091	.045	.013	.088	.044	.013	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.118	.086	.063	.101	.075	.055	.070	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006	
7.0	.103	.069	.045	.088	.060	.039	.061	.042	.028	.035	.025	.017	.011	.008	.005	
8.0	.097	.062	.039	.083	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.091	.057	.034	.079	.049	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.087	.052	.029	.075	.045	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

UGR(Unified Glare Rating) Table

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm											
NAME: 169-273					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:45			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H		14.8	15.6	15.0	15.8	15.9	14.1	14.8	14.3	15.0	15.1
	3H	14.7	15.4	14.9	15.6	15.8	13.9	14.7	14.2	14.9	15.1
	4H	14.6	15.3	14.9	15.5	15.7	13.9	14.6	14.2	14.8	15.0
	6H	14.5	15.1	14.8	15.4	15.6	13.9	14.6	14.2	14.8	15.1
	8H	14.5	15.1	14.8	15.3	15.6	14.0	14.6	14.3	14.9	15.1
	12H	14.4	15.0	14.7	15.3	15.5	14.0	14.6	14.4	14.9	15.2
4H	2H	14.6	15.3	14.9	15.5	15.7	13.8	14.5	14.1	14.7	14.9
	3H	14.4	15.0	14.7	15.3	15.5	13.7	14.3	14.0	14.6	14.9
	4H	14.3	14.9	14.7	15.2	15.5	13.7	14.3	14.1	14.6	14.9
	6H	14.2	14.7	14.6	15.0	15.4	13.8	14.3	14.2	14.6	15.0
	8H	14.2	14.6	14.6	15.0	15.4	13.9	14.3	14.3	14.7	15.1
	12H	14.2	14.6	14.6	14.9	15.3	14.0	14.4	14.4	14.8	15.2
8H	4H	14.2	14.6	14.6	15.0	15.4	13.6	14.0	14.0	14.4	14.8
	6H	14.1	14.5	14.6	14.9	15.3	13.7	14.1	14.2	14.5	14.9
	8H	14.1	14.4	14.6	14.9	15.3	13.9	14.2	14.3	14.6	15.1
	12H	14.1	14.4	14.6	14.8	15.3	14.1	14.4	14.6	14.8	15.3
12H	4H	14.2	14.6	14.6	14.9	15.3	13.6	14.0	14.0	14.3	14.7
	6H	14.1	14.4	14.6	14.8	15.3	13.7	14.0	14.2	14.5	14.9
	8H	14.1	14.4	14.6	14.8	15.3	13.9	14.2	14.4	14.6	15.1
Variations with the observer position at spacings:											
S = 1.0H	+ 3.9 / - 5.5					+ 3.0 / - 2.6					
1.5H	+ 6.5 / - 5.1					+ 5.3 / - 2.5					
2.0H	+ 1.8 / - 0.7					+ 0.8 / - 0.4					

CIE Pub.117, 664.1 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -1.4$)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

UTILIZATION FACTORS TABLE

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	82	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	105	104	98
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:IMIGY
 Test Date:2020-12-16

$V(B)$ Range:-85 - 85DEG
 $V(B)$ Interval: 2.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.240m [K=1.0000]
 Remarks: 169-273

ISOCANDELA DIAGRAM

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

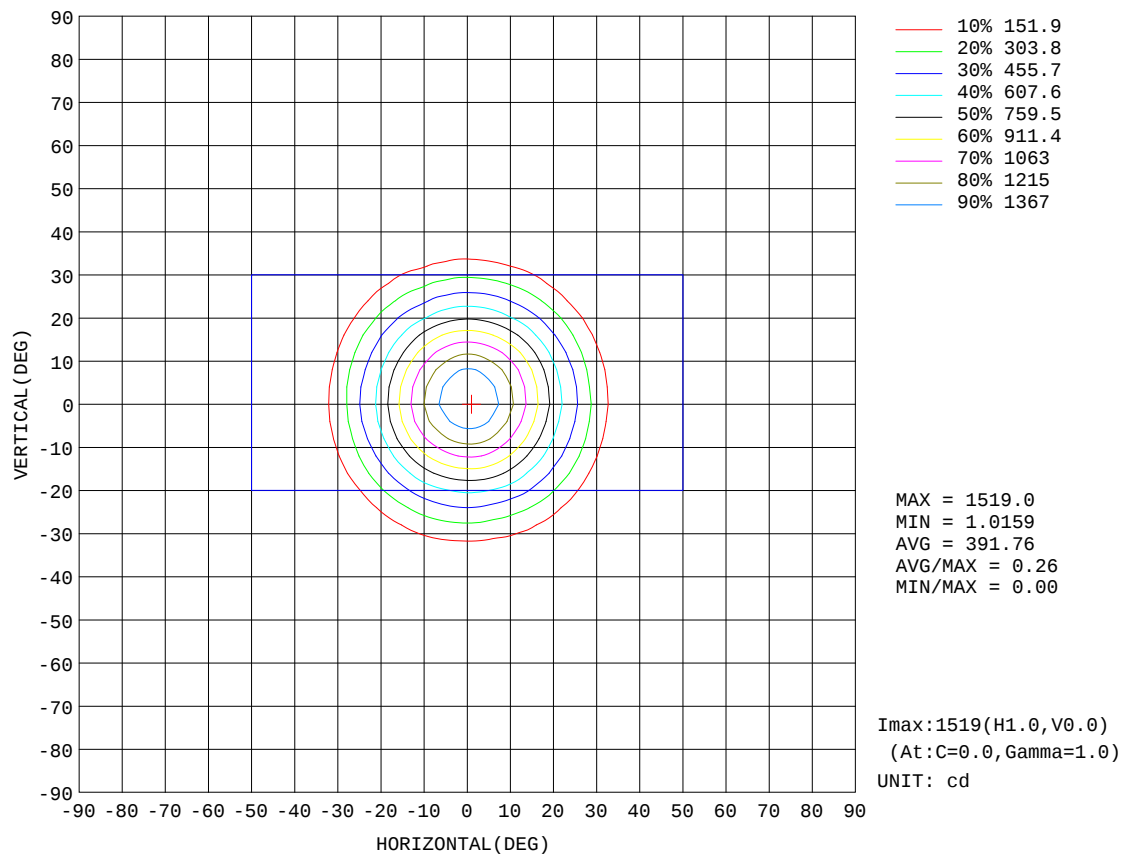


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

AAI Figure

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

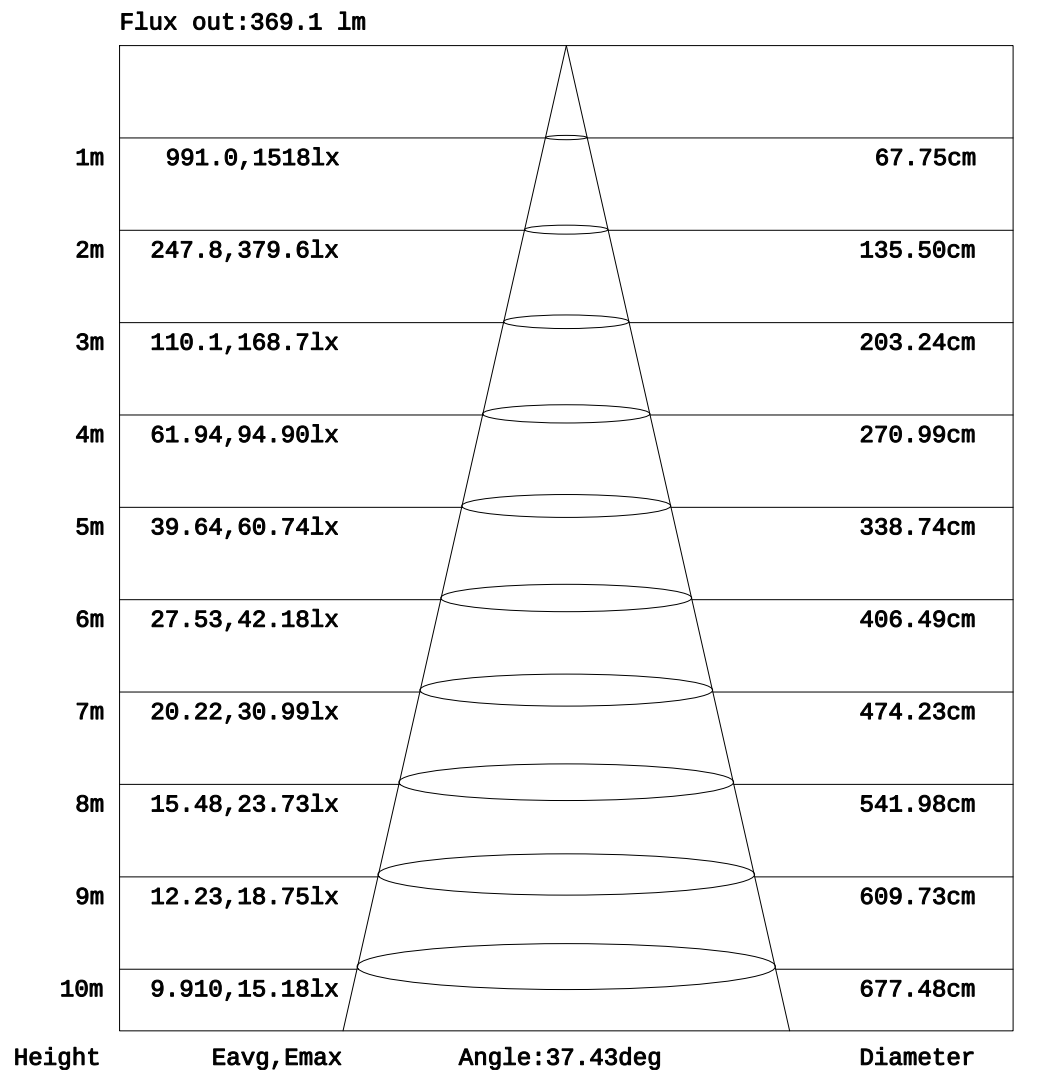


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

ISOLUX DIAGRAM

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

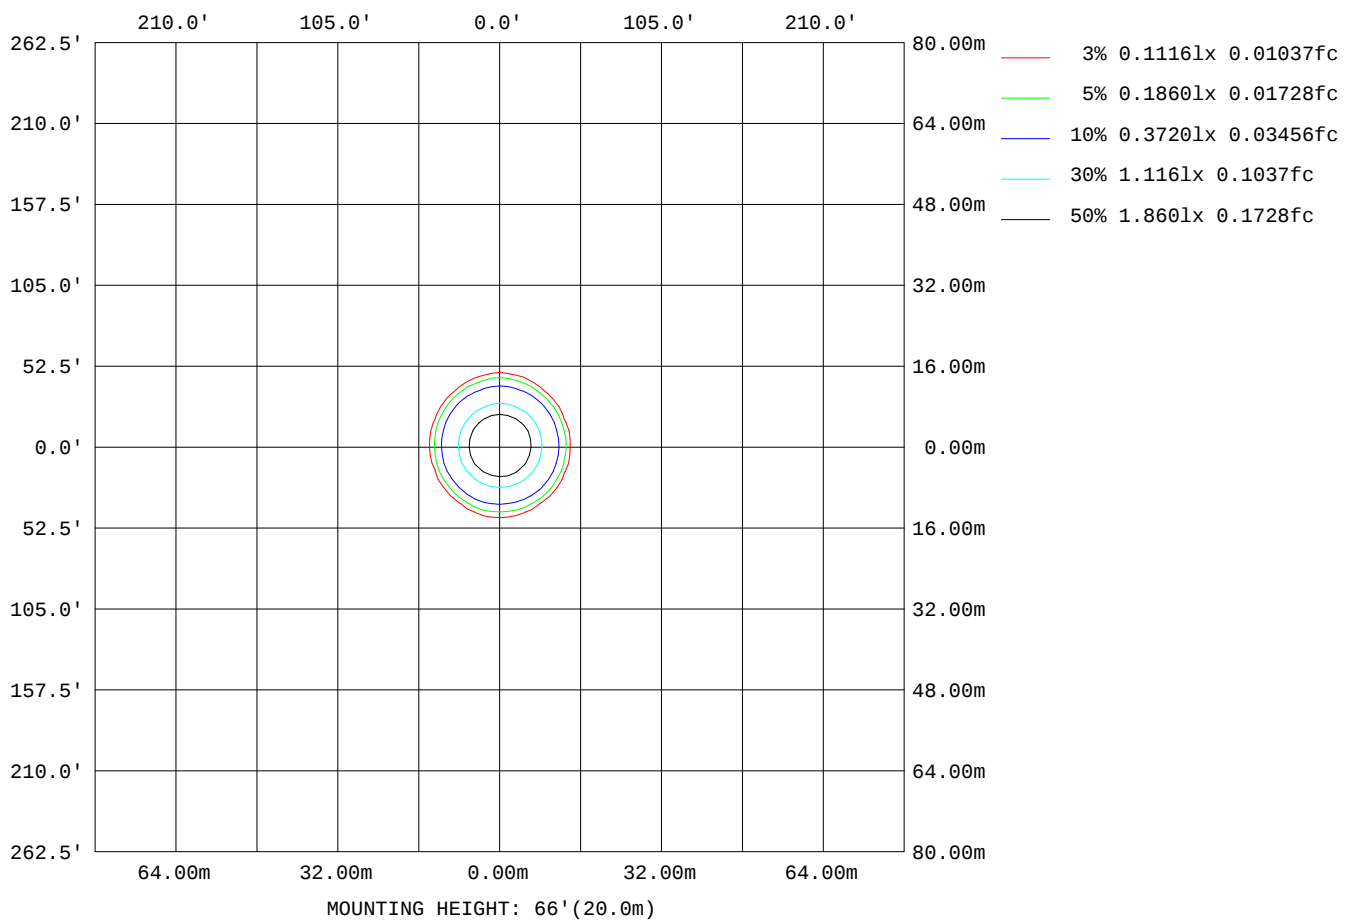

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

LED Avg.L Report

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	667
L_0~180(75)av	433
L_0~180(85)av	333
L_90~270(65)av	1294
L_90~270(75)av	1573
L_90~270(85)av	2013
L_45(65)av	1043
L_45(75)av	1265
L_45(85)av	2901

Standard: GB/T 29293-2012

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:IMIGY
 Test Date:2020-12-16

V(B) Range:-85 - 85DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.240m [K=1.0000]
 Remarks: 169-273

Planar Illuminance Curve

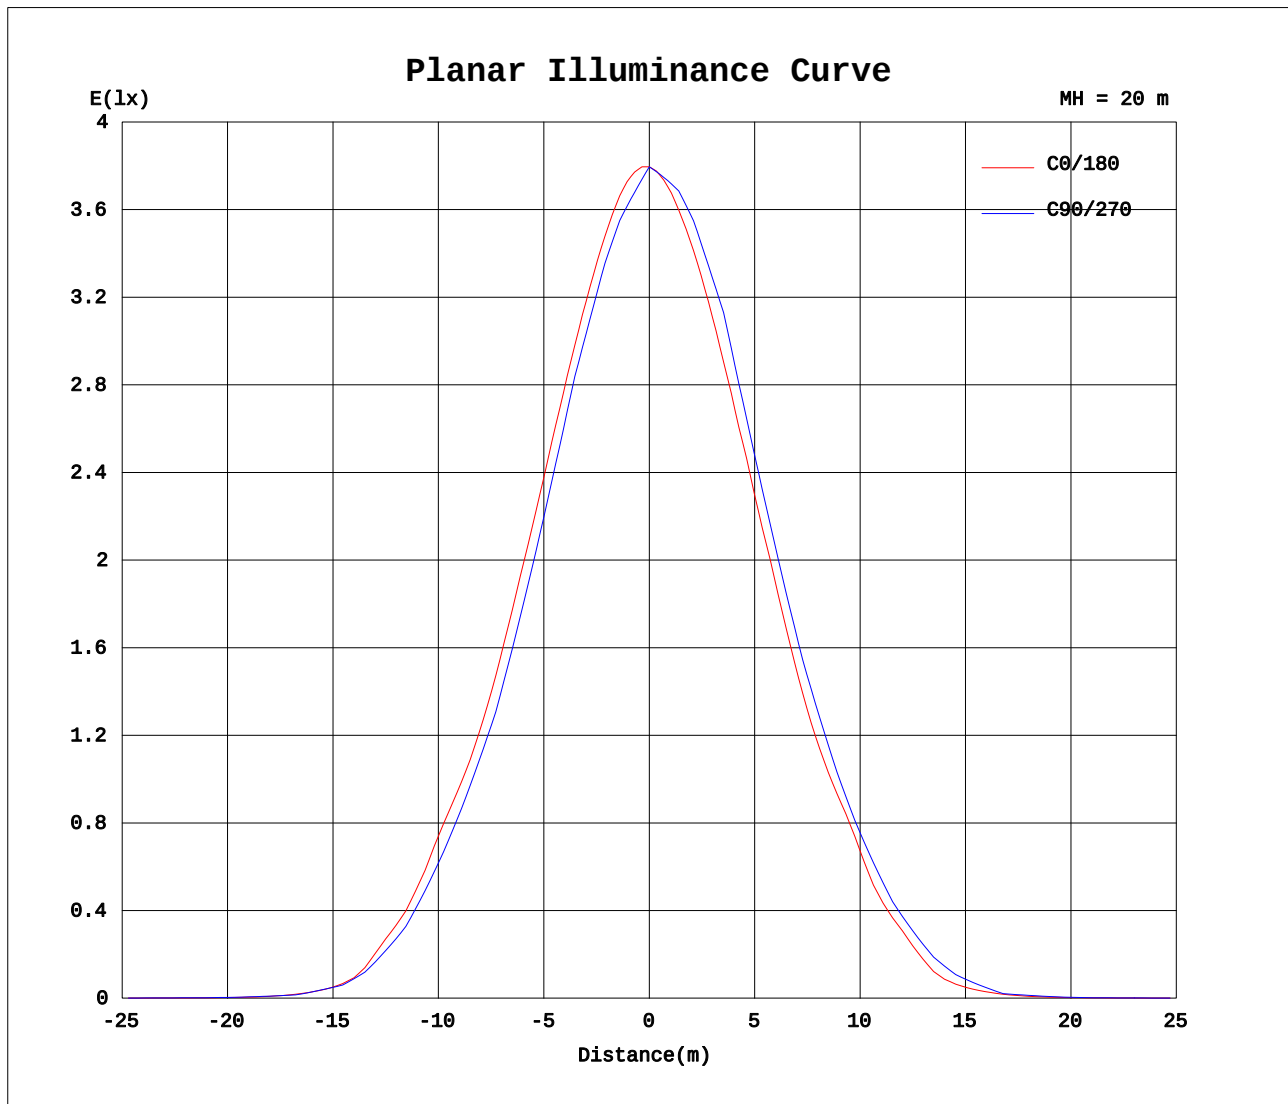

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

Table - -1

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

Table - -2

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

Table - - 3

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.52V I:0.0388A P:8.5704W PF:0.9585 Freq:49.99Hz Lamp Flux:664.139x1 lm		
NAME: 169-273	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:45	Shielding Angle:

Table - -4

UNIT: cd

[illegible]

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:IMIGY
Test Date:2020-12-16

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 169-273