

DECLARATION OF PERFORMANCE

No. 10290804201-CPR-19

Unique identification code of the product-type:

HENCO ISO4 – ISO9 – ISO13
BL, s1-d0

Intended use/es:

ThIBELL : Polyethylene Foam, intended to be used as Thermal insulation for building equipment and industrial installations.

Manufacturer:

HENCO INDUSTRIES nv
Toekomstlaan 27 – 2200 Herentals - Belgium
1

System/s of AVCP:

Harmonised standard:

Notified body:

EN 14313:2009+A1:2013

Notified certification body No. 0751 performed, carried out the determination of the product type, the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of constancy of performance for reaction to fire. Notified testing laboratory No. 0497 performed the test reports for reaction to fire.



Declared performance/s:

| Essential Characteristics | Performance |
|---|--|
| Thermal resistance / Thermal conductivity | $\lambda_{10^{\circ}\text{C}} \leq 0.036 \text{ W/(m}^{\circ}\text{K)}$ $\lambda_{40^{\circ}\text{C}} \leq 0.040 \text{ W/(m}^{\circ}\text{K)}$ $\lambda(\vartheta_m) = (35 + 0,087 \cdot \vartheta_m + 0,00098 \cdot \vartheta_m^2) / 1000 \text{ W/(m}^{\circ}\text{K)}$ |
| Dimensions and tolerances | Di = 6-300 mm, dD = 6-13 mm |
| Reaction to fire | BL-s1-d0 |
| Durability of thermal resistance against ageing/degradation | Dimensional stability (1) Minimum service temperature ST(-) NPD (=NPD °C) |
| Durability of thermal resistance against high temperature | Maximum service temperature ST(+) 100 (=100 °C) |
| Durability of reaction to fire against high temperature | (2) |
| Durability of reaction to fire against ageing / degradation | (2) |
| Compressive strength | (3) |
| Water permeability | WS01 |
| Water vapour permeability / Water vapour diffusion resistance | NPD μ |
| Rate of release of corrosive substances | Cl<500ppm, pH = 7 |
| Acoustic (absorption) index | NPD |
| Release of dangerous substances to the indoor environment | (4) |
| Continuous glowing combustion | (4) |

*Tolerances as per European Regulation EN 14313:2009+A1:2013 – Table 1

- 1) The thermal conductivity of PEF does not change with time.
- 2) The fire performance of PEF does not change with time.
- 3) Compressive strength is not applicable for PEF products.
- 4) European test methods are under development

NPD = No Performance Determined.


The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 (Requirements for Safety Data Sheets) of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in product data sheet.

As required by article 33 of regulation (EC) No 1907/2006 (Duty to communicate information on substances in article) we declare as follows: Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w).

Herentals, 02/01/2023

Signed for and on behalf of the manufacturer by:

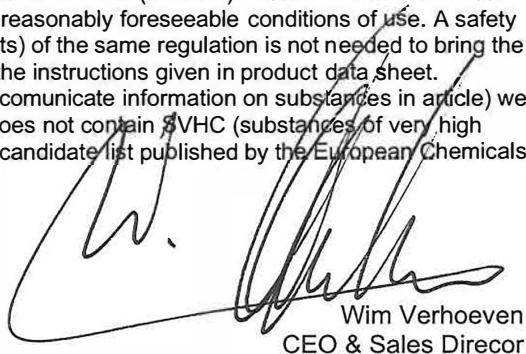

Wim Verhoeven
CEO & Sales Director