



Features

- START Eco Downlight is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 8W; 640Lm; 80Lm/W; 4000K.



Product Overview


| | |
|---------------------------------|----------------------------------|
| Product name | START Eco Downlight 95 640lm 840 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | PC Polycarbonate |
| Mount | Ceiling recessed mounting |
| Fixture luminous flux (lm) | 640 |
| Luminaire efficacy (lm/W) | 80 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Glare control | < 28 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 8 |
| Electrical protection | Class II |
| LED Flickering Rate | Medium (21% - 40%) |
| Housing colour | RAL 9003 - Signal white |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5410288539140 |

START Eco Downlight 95 640lm 840 0053914

Warranty

3 years

Photometry

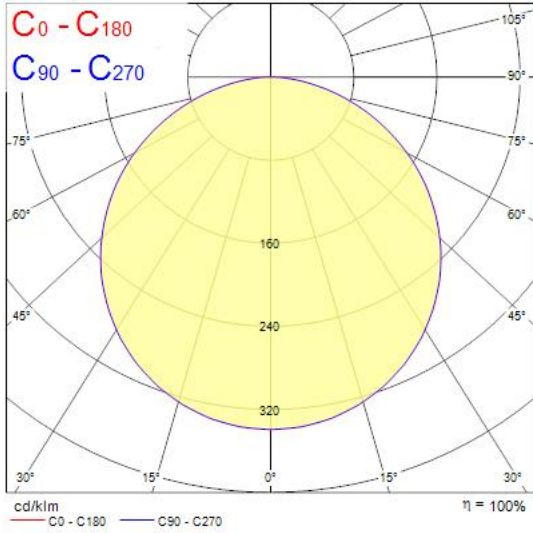

Technical drawings

