

Sylvania Granit 0-10V - NEW
Granit IP65 0-10V 13000lm 840 MB
0039730

Image not found.

Product features

- Integrated LED highbay; Black aluminium housing; 13000Lm; 80 W; 163 Lm/W; 4000K; Drive current: 410mA; CRI 80; 55° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B20 92,000 hrs; (D x H) 298 x 168 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.



PRODUCT OVERVIEW

Product name	Granit IP65 0-10V 13000lm 840 MB
Technology	LED
Cap/Base	N/A
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357096
Warranty	5 years
Fixture luminous flux (lm)	13000
Luminaire efficacy (lm/W)	163
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	55
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	80
Electrical protection	Class I
Dimmable	Yes
Dimming method	0-10V
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288397306

DATA TABLE

General data	
Product name	Granit IP65 0-10V 13000lm 840 MB
Technology	LED
Cap/Base	N/A

Sylvania Granit 0-10V - NEW

Granit IP65 0-10V 13000lm 840 MB

0039730

General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001716
E-number FI	4357096
Warranty	5 years

Optical data

Fixture luminous flux (lm)	13000
Luminaire efficacy (lm/W)	163
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	55
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	80
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	410
Inrush Current (A)	80
Inrush Duration (µs)	300
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	5
Max. products per 13A C Breaker	6
Max. products per 16A C Breaker	9
Max. products per 20A C Breaker	11
Max. products per 10A B Breaker	3
Max. products per 13A B Breaker	7
Max. products per 16A B Breaker	5
Max. products per 20A B Breaker	6
Mains surge immunity (differential mode - > L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	6

Sylvania Granit 0-10V - NEW
Granit IP65 0-10V 13000lm 840 MB
0039730

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	92000
Lifespan L90 B50	51000

Physical data

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Nominal Product Height (mm)	168
Nominal Product Diameter (mm)	298
Weight (kg)	2.243


Packaging

Single packaging type	Carton
Product EAN number	5410288397306
Packaging single length / height (cm)	32.5
Packaging single width (cm)	32.5
Packaging single depth (cm)	14.5
DUN14 (outer)	05410288397306
Units per outer package	1
Packaging outer length / height (cm)	32.5
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	14.5

Safety data

Optimal operating condition (°C)	-30-50
----------------------------------	--------

PHOTOMETRY

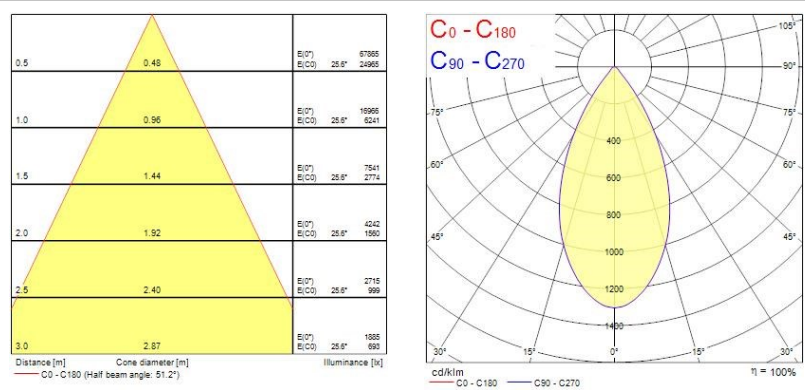

TECHNICAL DRAWINGS

Sylvania Granit 0-10V - NEW

Granit IP65 0-10V 13000lm 840 MB
0039730

